

**ANALYSIS OF REINFORCE CONCRETE BUILDING USING DIFFERENT BRACING
SYSTEM UNDER EARTHQUAKE LOADING****Pradeep Yadav*, S.S. Khuswaha**

Department of Civil Engineering, UIT (RGPV), Bhopal (MP).

ABSTRACT

In this study, seismic analysis of multi storey RC building frames have been carried out considering different types of bracing systems. Bracing systems are very efficient in resisting lateral forces. STAAD.Pro software has been used for analysis purpose. Analyses of multi storey RC building frames are carried out in 2 parts I) Building frame without bracing systems and II) Building frames with Bracing systems Three different type of bracing systems i.e. X Bracing, K Bracing and V Bracing including bracing core and outer pattern have been considered. Results are collected in terms of maximum moments in beams, axial force, shear force, maximum displacement and storey displacement which are critically analysed to quantify the effects of various parameters. This approach focuses on the arrangement of bracing in a structure and their effectiveness in reducing the lateral displacement ultimately to achieve economy in construction with similar structural frames.

KEYWORDS— Seismic; Bracing; Maximum moment; Shear Force; Storey displacement; Peak storey displacement;

INTRODUCTION

Steel braced frame is one of the structural systems used to resist wind loads in multi stories buildings. Many existing steel buildings need retrofit to overcome deficiencies to resist wind loads. The use of steel bracing systems for strengthening or retrofitting steel buildings frames is a viable solution for enhancing wind resistance. Steel bracing is economical, easy to erect, occupies less space and has flexibility to design for meeting the required strength and stiffness. The lateral stiffness of the building is controlled by different structural systems. These are:

- Using unbraced frame with moment-resisting connections.
- Using braced frame with moment-resisting connections.
- Using braced frame with pin-jointed connections.
- Using braced frame with both moment-resisting and pin-jointed connections.

Some of the prominent literature on the topic are as follows -

Kulkarni et.al. (2013) concluded that optimally braced frames are stiff, strong, and an economical structural system. According to them, a fully braced frame are very stiff and over safe in so far as lateral drift is concerned but uneconomical and at the contest optimally braced frames have least forces induced in the structure and produce maximum displacement but within prescribed limit. Kevadkar and Kodag (2013) observed that the structures heavily susceptible to lateral forces may be concerned to severe damage. In this they found that along with gravity load the frames are able to withstand to lateral load which can develop high stresses. For this purpose they used shear wall and steel bracing system to resist such type of loading like earthquake, wind, blast etc. Jesumi, and Rajendran (2013) studied on the major system providing lateral load resistance in steel lattice towers. They used different types of bracing systems on towers. The heights of towers varied from 20 to 500 meters. This study has focused on identifying the economical bracing system for a given range of tower heights. Seyed Mehrdad Nourbakhsh (2011) studied the performance of eccentric braces which is to some extent considered as a new subject amongst Civil Engineers. In this study nine frames were considered which were braced with three different eccentric braces (V, Inverted-V and Diagonal) in three different heights (4, 8 and 12 story). The frames were assessed by nonlinear static (pushover) analysis mainly based on FEMA 440. As a result of these frame analysis, it was observed that the plastic hinges firstly

occur at the fuse section of braces and then at the compressive members of the eccentric braces. But on the other hand using the eccentric diagonal braces for low and medium rise structures more logical and acceptable from economical point of view as this type of bracing system absorbs considerably more energy when compared with eccentric V and Inverted V bracing systems. Gajjar and DhavalP.Advani (2011) focused on the design of multi-storeyed steel buildings to have good lateral load resisting system along with gravity load system because it also governs the design. This paper was presented to show the effect of different types of bracing systems in multi storied steel buildings. For this purpose the 20 stories steel buildings models were used with same configuration and different bracings systems such as knee brace, X brace and V brace. Salehuddun (2011) focused on nonlinear geometric analysis to be compared with linear analysis. In this study, a six storey 2-D steel frame structure with 24 m height had been selected to be idealized as tall building model. The model was analyzed by using SAP2000 structural analysis software with the consideration of geometric nonlinear effect. This study showed that a steel frame with the consideration of wind load produce greater sway value as compared to the steel frame without wind load. Jayachandran and vidyanatham (2009) carried out study to enable optimization of initial structural systems for drift and stresses, based on gravity and lateral load. The design issues were efficiency of systems, rigidity, member depths, balance between sizes of beam and column, bracings, as well as spacing of columns, and girders, and areas and inertias of members. Ming Gu(2009) studied wind-resistance of steel tall buildings and structures. Wind tunnel tests were carried out on 27 typical tall building models by using wind pressure scanning and HFFB techniques. Interference effects on wind forces and wind pressures among two and three tall buildings were experimentally investigated with about 10,000 testing cases. Theoretical study on equivalent static wind loads of tall buildings and structures were then introduced. Especially, a new concept of “mode coupling factor” and a modified SRSS method for wind response and equivalent static wind load of complicated tall buildings and structures with consideration of multi-mode contributions and their coupling effects were considered. Ilyas Yildirim (2009) investigated optimal lateral bracing systems in steel structures under wind. For this purpose evolution strategies optimization method was used which is a member of the evolutionary algorithms search techniques. First optimum design of steel frames was introduced then evolution strategies technique was explained. This is followed by design loads and bracing systems and it is continued by the cost analysis of the models. Optimum designs of three different structures, comprising twelve different bracing models were carried out. The calculations were carried out by a computer program (OPTSTEEL).

Aim for this study is to understand the effect of seismic in multi storey structure and the remedial measures to control these effects. To do this, models are generated and analysed with the help of STAAD.Pro software, and the effect of with and without bracing systems (X, K and V) including core and outer pattern to resist the seismic forces are critically analysed.

METHODOLOGY

Following steps have been adopted in this study-

Step-1 selection of building geometry, bays and story

Step-2 Selection of bracing model (X bracing frame, V bracing frame, K bracing frame, with core and outer bracing systems)

Step-3 selection of 4 seismic zones (II,III,IV and V)

Step-4 Formation of load combination (13 load combinations)

Load case no.	Load cases details
1.	E.Q. IN X DIR.
2.	E.Q. IN Z DIR.
3.	DEAD LOAD
4.	LIVE LOAD

5.	1.5 (DL + LL)
6.	1.5 (DL + EQX)
7.	1.5 (DL - EQX)
8.	1.5 (DL + EQZ)
9.	1.5 (DL - EQZ)
10.	1.2 (DL + LL + EQX)
11.	1.2 (DL + LL - EQX)
12.	1.2 (DL + LL + EQZ)
13.	1.2 (DL + LL - EQZ)

Step-5 Modelling of building frames

Step-6 Analysis considering different bracing system, seismic zones and each load combinations

Step-7 Comparative study of results in terms of maximum moments in columns and beams, base shear, story displacement, peak story displacement.

STRUCTURAL MODELLING AND ANALYSIS

CASE-1: Bare frame without bracing of G+7 storey height.

CASE-2: K bracing at core of G+7 storey height.

CASE-3: K bracing at outer of G+7 storey height.

CASE-4: V bracing at core of G+7 storey height.

CASE-5: V bracing at outer of G+7 storey height.

CASE-6: X bracing at core of G+7 storey height.

CASE-7: X bracing at outer of G+7 storey height.

CASE-8: X bracing at core of G+7 storey height.

CASE-9: X bracing at outer of G+7 storey height.

STAAD.Pro is used in modelling of building frames. STAAD.Pro is Structural Analysis and Design Program is a general purpose program for performing the analysis and design of a wide variety of structures. The basic three activities which are to be carried out to achieve this goal are –

- a. Model generation
- b. Calculations to obtain the analytical results
- c. Result verification- These are all facilitated by tools contained in the program's graphical environment.

4.4 STRUCTURAL MODELS

Structural models for different cases are shown in Fig. 4.1 to 4.4. No. of beams and columns in each cases are given in Table 4.1

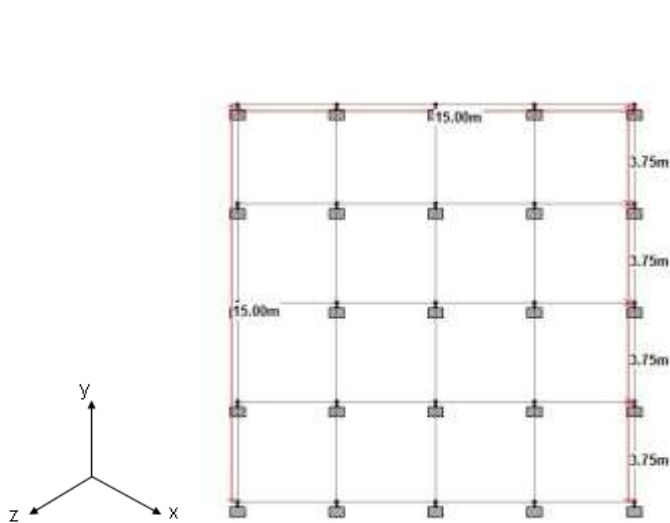


Figure 4.4: Plan of Bare frame

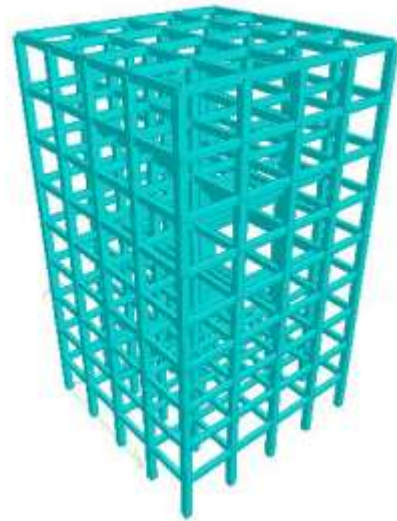


Figure 4.3: Structural model of Bare frame

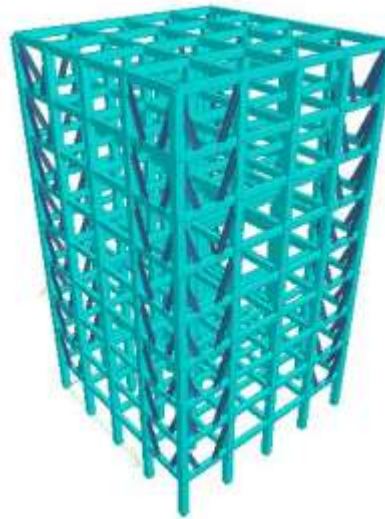
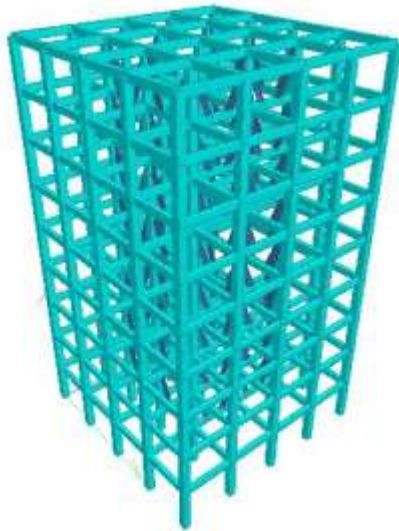


Figure 4.5: Structural model of K Bracing at Core Figure 4.7: Structural model of K bracing at outer

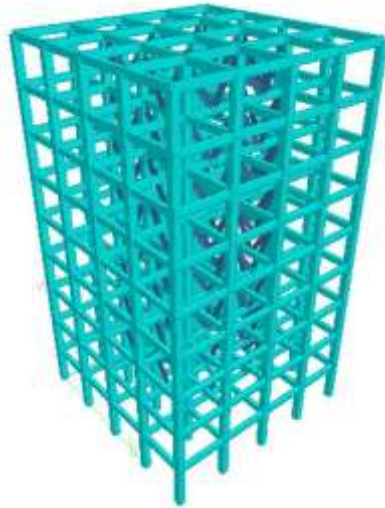


Figure 4.9: Structural model of V bracing at core



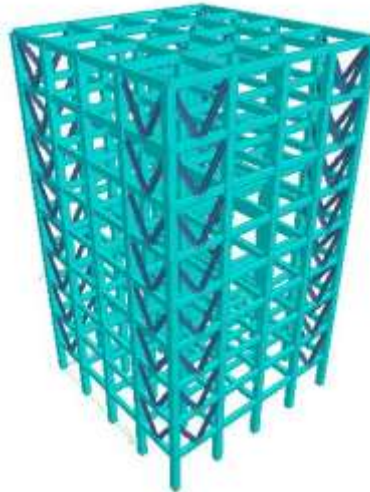


Figure 4.10: Structural model of V bracing at outer

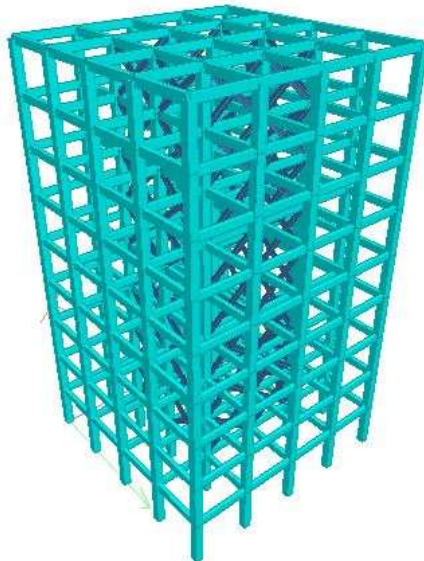

Structural model of X bracing at core

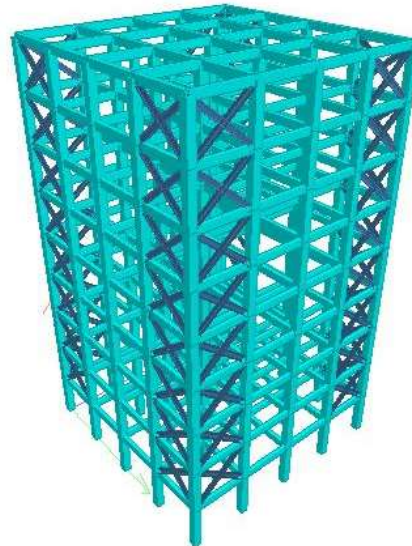

Structural model of X bracing at core

The column size is of 450MM x 450MM, and the beam size is 230MM x 450MM.

4.5 MATERIAL AND GEOMERICAL PROPERTIES

Following material properties have been considered in the modelling -

Density of RCC: 25 kN/m³

Density of Masonry: 20 kN/m³ (Assumed)

Young's modulus of concrete: $5000\sqrt{f_{ck}}$

Poisson's ratio: 0.17

The foundation depth is considered at 2.0m below ground level and the typical storey height is 3.0 m.

4.6 LOADING CONDITIONS

Following loadings are considered for analysis -

(a) Dead Loads: as per IS: 875 (part-1) 1987

Self wt. of slab considering 150 mm thick. Slab = $0.15 \times 25 = 3.75 \text{ kN/m}^2$ (slab thick. 150 mm assumed)

Floor Finish load = 1 kN/m^2

Water Proofing Load on Roof = 2.5 kN/m^2

Masonry Wall Load = $0.25 \times 2.55 \times 20 = 12.75 \text{ kN/m}$

(b) Live Loads: as per IS: 875 (part-2) 1987

Live Load on typical floors = 2 kN/m^2

Live Load on Roof = 1.5 kN/m^2

(c) Earth Quake Loads:

All the building frames are analyzed for 4 seismic zones

The earth quake loads are derived for following seismic parameters as per IS: 1893 (2002) [21]

a. Earth Quake Zone-II,III,IV,V (Table - 2)

b. Importance Factor: 1 (Table - 6)

c. Response Reduction Factor: 5 (Table - 7)

d. Damping: 5% (Table - 3)

e. Soil Type: Medium Soil (Assumed)

f. Period in X direction (PX): $\frac{0.09 \cdot h}{\sqrt{dx}}$ seconds Clause 7.6.2 [21]

g. Period in Z direction (PZ): $\frac{0.09 \cdot h}{\sqrt{dz}}$ seconds Clause 7.6.2 [21]

Where h = height of the building

dx = length of building in x direction

dz = length of building in z direction

RESULTS AND DISCUSSION

The results are discussed in bracing system system

BRACING MODELS

Results can be described under following heads –

Table 1: Maximum displacement in X direction of bracing system

Max Peak story deflection				
Structure type	Zone II	Zone III	Zone IV	Zone V
Bare Frame	38.465	61.488	92.186	138.232
X Bracing at Outer	23.555	37.307	55.909	83.812
X Bracing at Core	14.614	23.34	34.974	52.425
V Bracing at outer	35.166	56.207	84.262	128.344
V Bracing at core	34.784	55.492	83.101	124.516
K Bracing at outer	35.675	57.021	85.484	128.177
K Bracing at core	35.366	56.387	84.414	128.456

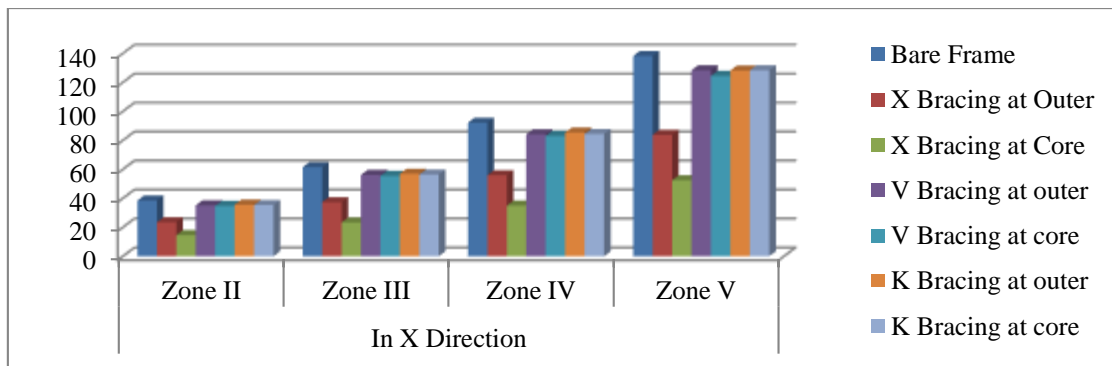


Fig 1: Maximum displacement in X direction of bracing system

Table 3: Maximum Bending moment in bracing system

Structure type	Max Bending Moment			
	Zone II	Zone III	Zone IV	Zone V
Bare Frame	137.728	187.212	253.191	366.537
X Bracing at Outer	106.784	134.377	171.169	227.787
X Bracing at Core	91.016	118.454	155.038	209.914
V Bracing at outer	133.188	176.913	236.177	333.159
V Bracing at core	124.018	165.918	224.689	335.445
K Bracing at outer	131.481	179.090	238.830	337.871
K Bracing at core	125.652	168.535	225.712	332.573

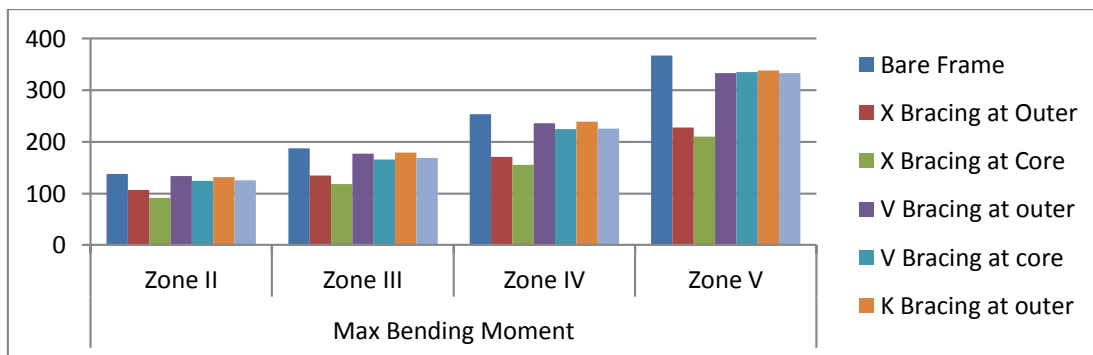


Fig 3: Maximum Bending moment in bracing system

Table 4: Maximum shear force in bracing system

Structure type	Max Shear force			
	Zone II	Zone III	Zone IV	Zone V
Bare Frame	115.938	141.473	175.52	226.59
X Bracing at Outer	106.815	114.256	131.221	162.403
X Bracing at Core	92.489	106.087	124.865	153.032
V Bracing at outer	113.703	136.219	166.75	213.261
V Bracing at core	109.377	131.711	161.49	206.34
K Bracing at outer	114.371	137.343	168.159	215.313
K Bracing at core	110.247	133.104	163.579	209.292

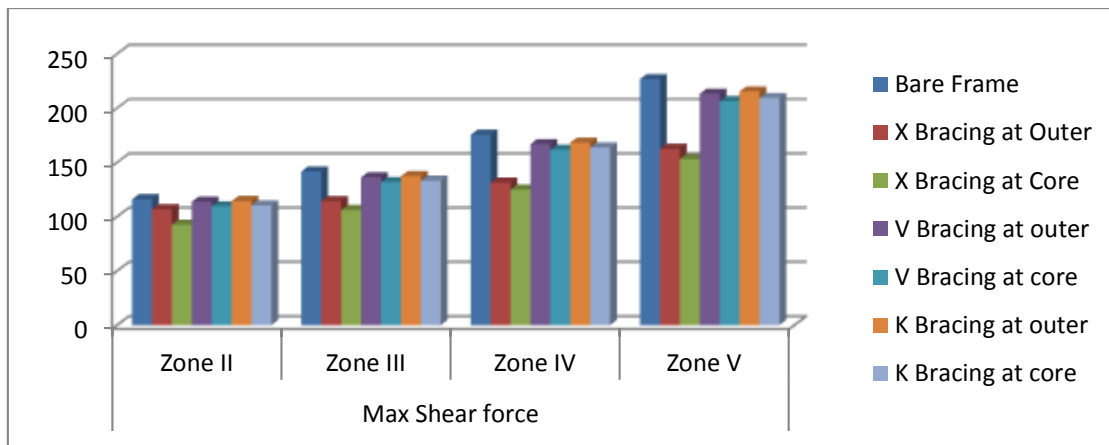


Fig 4: Maximum shear force in bracing system

Table 4: Max. storey displacement in zone-II in bracing system

Max story displacement in structure in Zone-II							
Floor	Bare Frame	X Bracing at Outer	X Bracing at Core	V Bracing at outer	V Bracing at core	K Bracing at outer	K Bracing at core
Base	0	0	0	0	0	0	0
GF	2.088	2.034	0.969	1.914	1.893	1.889	1.916
1st Floor	5.565	2.945	2.411	5.025	5.039	5.033	5.107
2nd Floor	9.239	3.973	3.806	8.243	8.357	8.355	8.483
3rd floor	12.828	5.139	5.132	11.383	11.597	11.597	11.787
4th floor	16.184	6.365	6.388	14.324	14.63	14.63	14.884
5th floor	19.162	7.594	7.546	16.947	17.329	17.33	17.643
6th floor	21.608	8.78	8.541	19.123	19.551	19.562	19.911
7th floor	23.362	9.885	9.28	20.723	21.15	21.197	21.546
8th floor	24.378	10.895	9.695	21.698	22.074	22.187	22.493

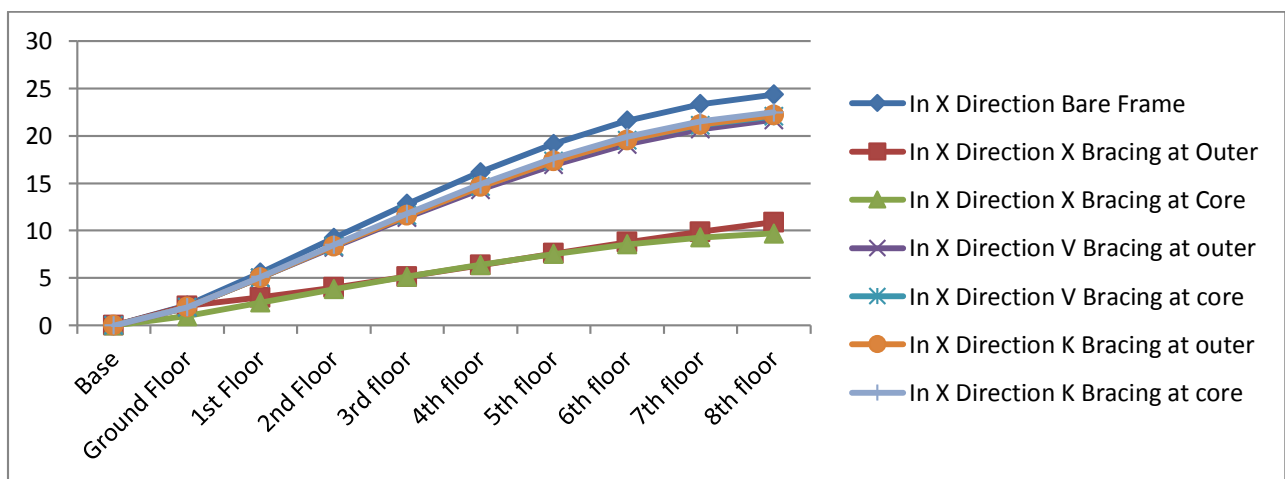
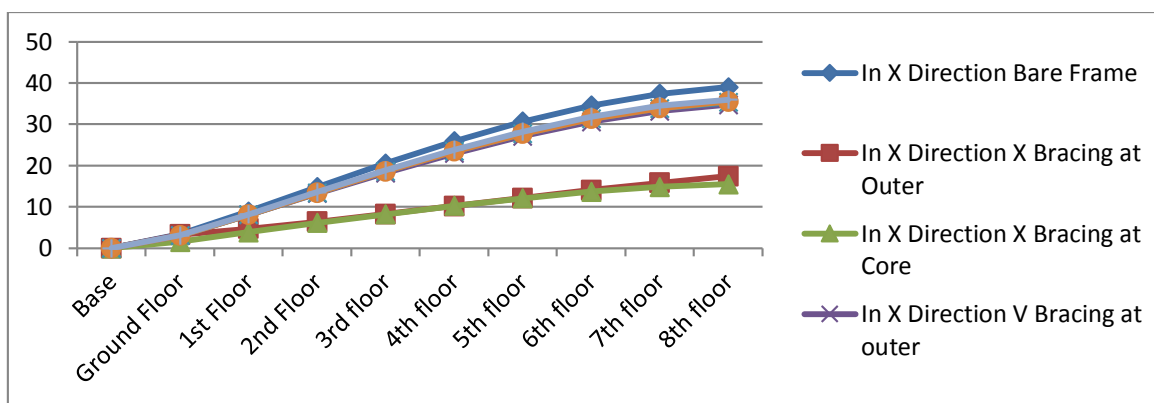


Fig 4: Max. storey displacement in zone-II in bracing system

Table 5: Max. storey displacement in zone-III in bracing system

Max story displacement in structure in Zone-III							
Floor	In X Direction						
	Bare Frame	X Bracing at Outer	X Bracing at Core	V Bracing at outer	V Bracing at core	K Bracing at outer	K Bracing at core
Base	0	0	0	0	0	0	0
GF	3.341	3.254	1.55	3.062	3.03	3.023	3.065
1st Floor	8.903	4.713	3.858	8.041	8.063	8.053	8.171
2nd Floor	14.782	6.356	6.09	13.189	13.372	13.367	13.573
3rd floor	20.525	8.23	8.211	18.212	18.555	18.556	18.86
4th floor	25.894	10.184	10.22	22.919	23.408	23.409	23.814
5th floor	30.66	12.151	12.073	27.116	27.726	27.727	28.225
6th floor	34.572	14.048	13.666	30.597	31.282	31.3	31.858
7th floor	37.379	15.815	14.848	33.157	33.84	33.916	34.474
8th floor	39.004	17.431	15.512	34.716	35.319	35.499	35.989


fig. 5: Max. storey displacement in zone-III in bracing system
Table 6: Max. storey displacement in zone-IV in bracing system

Max story displacement in structure in Zone-IV							
Floor	In X Direction						
	Bare Frame	X Bracing at Outer	X Bracing at Core	V Bracing at outer	V Bracing at core	K Bracing at outer	K Bracing at core
Base	0	0	0	0	0	0	0
GF	5.012	4.881	2.325	4.593	4.544	4.534	4.598
1st Floor	13.355	7.069	5.787	12.061	12.095	12.08	12.257
2nd Floor	22.174	9.535	9.135	19.783	20.057	20.051	20.36
3rd floor	30.788	12.334	12.316	27.319	27.833	27.834	28.29
4th floor	38.841	15.275	15.331	34.378	35.111	35.113	35.721
5th floor	45.99	18.226	18.109	40.674	41.589	41.591	42.337
6th floor	51.858	21.071	20.499	45.895	46.923	46.95	47.787
7th floor	56.069	23.723	22.271	49.735	50.76	50.874	51.711
8th floor	58.508	26.147	23.268	52.074	52.978	53.248	53.983

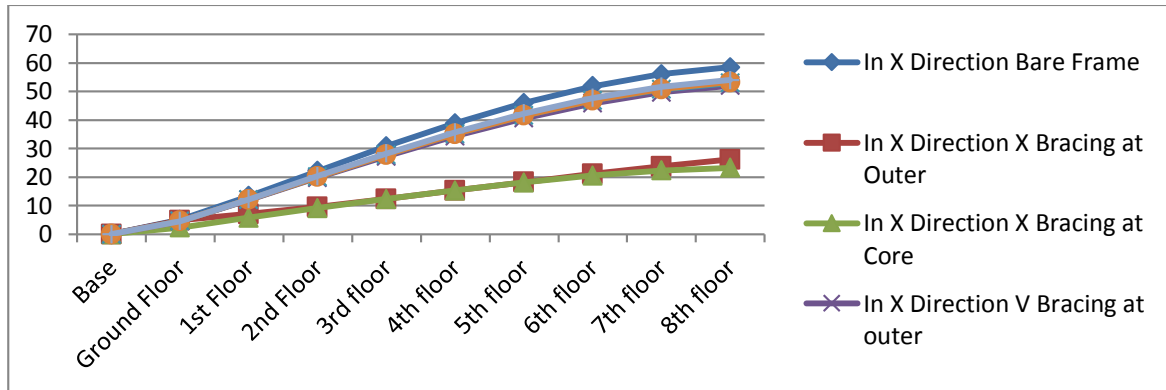


Fig. 6: Max. storey displacement in zone-IV in bracing system

Table 7: Max. storey displacement in zone-V in bracing system

Max story displacement in structure in Zone-V							
Floor	In X Direction						
	Bare Frame	X Bracing at Outer	X Bracing at Core	V Bracing at outer	V Bracing at core	K Bracing at outer	K Bracing at core
Base	0	0	0	0	0	0	0
GF	7.517	7.321	3.488	6.889	6.817	6.801	6.897
1st Floor	20.033	10.6032	8.68	18.092	18.142	18.12	18.385
2nd Floor	33.26	14.302	13.703	29.675	30.086	30.077	30.54
3rd floor	46.182	18.501	18.474	40.978	41.749	41.757	42.435
4th floor	58.262	22.913	22.996	51.568	52.667	52.67	53.581
5th floor	68.985	27.339	27.164	61.011	62.383	62.387	63.506
6th floor	77.787	31.607	30.748	68.842	70.384	70.424	71.681
7th floor	84.103	35.585	33.407	74.603	76.41	76.31	77.566
8th floor	87.759	39.22	34.902	78.111	79.467	79.873	80.975

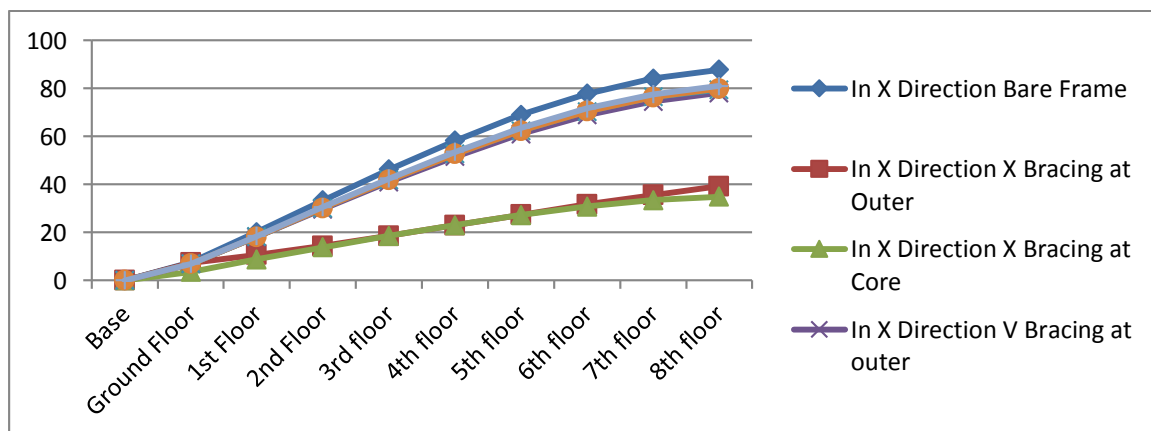


Fig. 7: Max. storey displacement in zone-V in bracing system

CONCLUSION

Following are the salient conclusions of this study-

From the present study it is seen that bracing system is efficient in reducing bending moment, shear force, storey displacement, maximum displacement. In this study two efficient bracing patterns (core and outer) are used and by comparing both core is best. And among various bracing system (X bracing, K bracing and V bracing) X bracing is stable and reduces result parameters (bending moment, shear force, storey displacement, maximum displacement) in all seismic zones. So final conclusion is that X bracing at core is efficient and stable

REFERENCES

- [1] Bo Dowswell, P.E., Allen Brice, Brian Blain, An overview of lateral load resisting systems and how to implement them, Morden Steel Construction, July 2010.
- [2] Gajjar R.K., Dhaval P. Advani, Investigation of efficient bracing system as per IS 800:2007 National Conference on Recent Trends in Engineering & Technology, 13-14 May 2011.
- [3] Ilyas Yildirim, Optimal wind bracing systems for multi-storey steel buildings, Middle East Technical University, August 2009, Turkey.
- [4] IS: 875(part-3), Code of practice for design loads (other than earthquake) for buildings and structures, Part-3 Wind loads, Bureau of Indian Standards, New Delhi, 1987.
- [5] Jesumi A., Rajendran M.G., Optimal bracing system for steel towers, International Journal of Engineering Research and Applications (IJERA), Vol. 3, Issue 2, March -April 2013, pp.729-732.
- [6] Jayachandran, S.A. and Vidyanathan, C.V., Comparative studies on simplified models for the earthquake analysis of building frames, Proc. Tenth Symp., on Earthquake Engg., November, 2009, Vol. I, pp 371-380. Roorkee.
- [7] Kevadkar M.D., Kodag P.B., Lateral load analysis of R.C.C. building, International Journal of Modern Engineering Research, Vol.3, Issue.3, May-June. 2013 pp-1428-1434.
- [8] Kulkarni J. G., Kore P. N., Tanawade S. B., Seismic response of reinforced concrete braced frames, International Journal of Engineering Research and Applications, Vol. 3, Issue 4, Jul-Aug 2013, pp.1047-1053.
- [9] Ming Gu, Study on wind loads and responses of tall buildings and structures, Seventh Asia-Pacific Conference on Wind Engineering, November 8-12, 2009, Taipei, Taiwan.
- [10] Seyed Mehrdad Nourbakhsh, Inelastic behavior of eccentric braces in steel structure, Eastern Mediterranean University, December 2011, Northern Cyprus.
- [11] Salehuddin Shamshinar, Stability of a six storey steel frame structure, International Journal of Civil & Environmental Engineering, Vol.13 No.06, 2011.
- [12] User Manual STAAD.Pro software, 2013.