



## INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH TECHNOLOGY

### Voltage Produced by different Salts Concentration on Single Chamber Microbial Fuel Cell

Amit Prem Khare

M.Tech Scholar, Energy Technology, Takshshila Institute of Engineering & Technology, Jabalpur, M P, India

[mhmuddebihal@yahoo.co.in](mailto:mhmuddebihal@yahoo.co.in)

#### Abstract

The application of Microbial Fuel Cell (MFC) for electricity generation has been developing recently. In recent years, researchers have shown that MFC can be used to produce electricity from water containing glucose, acetate or lactate. This research explores the application of Single chamber MFC in generating electricity using mixture of the waste water of biscuit factory and vermicompost collected from Jabalpur. The different concentration of NaCl and KCl in salt bridge has been performed. The maximum voltage obtained with respect to time (days) by these results. The potential difference generated by the MFC was measured using multimeter.

**Keywords:** Electricity, Salt bridge, Single chamber MFC, Waste water.

#### Introduction

Energy calamity in India is rising each year, as there is constant acclivity in the price of fuels and also due to depletion of fossil fuels to a larger level [1]. The demand for an alternating fuel has erupted extensive research in discovering a potential, economical and reusable source for energy manufacture. For constructing a sustainable world we require to minimize the expenditure of fossil fuels as well as the pollution generated. These two aims can be accomplished all together by treating the waste water (From disposing waste to using it). Industrial waste, agricultural waste and household waste are ideal substrates for energy productions as they are rich in organic contents.

MFC (Microbial fuel cell) can be best defined as a fuel cell where microbes act as catalyst in degrading the organic content to produce electricity. It is a device that straight away converts microbial metabolic or enzyme catalytic energy into electricity by using usual electrochemical technology [2].

In direct electron transfer, there are several microorganisms (Eg. *Shewanella putrefaciens*, *Geobacter sulfurreducens*, *G. metallireducens* and *Rhodospirillum rubrum*) that transfer electrons from inside the cell to extracellular acceptors via c-type cytochromes, biofilms and highly conductive pili (nanowires) [3]. These microorganisms have high Coulombic efficiency and can form biofilms on the anode surface that act as electron acceptors and

transfer electrons directly to the anode resulting in the production of more energy [4] [5].

In indirect electron transfer, electrons from microbial carriers are transported onto the electrode surface either by a microorganism's (*Shewanella oneidensis*, *Geothrix fermentans*) own mediator which in turn facilitate extracellular electron transfer or by added mediators. The MFCs that use mediators as electron shuttles are called mediator MFCs. Mediators provide a platform for the microorganisms to generate electrochemically active reduced products. The reduced form of the mediator is cell permeable, accept electrons from the electron carrier and transfer them onto the electrode surface [6]. Usually neutral red, thionine, methylene blue, anthraquinone-2, 6-disulfonate, phenazines and iron chelates are added to the reactor as redox mediators [7]. Various types of the microbial fuel cell exists, differing majorly on the source of substrates, microbes used and mechanism of electron transfer to the anode. Based on mechanism of electron transfer to the anode, there are two types of microbial fuel cell which are the mediator microbial fuel cell and the mediator-less microbial fuel cell.

Mediator-less microbial fuel cells are use special microbes which possess the ability to donate electrons to the anode provided oxygen (a stronger electrophilic agent) is absent [8],[9]. There are variants of the mediator-less microbial fuel cell

which differ with respect to the sources of nutrient and type of inoculum used.

Mediator-microbial fuel cells are microbial fuel cells which use a mediator to transfer electrons produced from the microbial metabolism of small chain carbohydrates to the anode [10]. This is necessary because most bacteria cannot transfer electrons directly to the anode [8]. Mediators like thionine, methyl blue, methyl viologen and humic acid tap into the electron transport chain and abstract electrons (becoming reduced in the process) and carry these electrons through the lipid membrane and the outer cell membrane [11],[12].

## Material and Method

### MFC Construction

#### Electrode

Carbon electrode was used at both the ends of cathode and anode and tightly fixed with the single container containing medium, culture and buffer.

#### Anodic Chamber

The 2 liters sterilized plastic bottle is used for this purpose. The bottle is surface sterilized by washing with 70% ethyl alcohol and 1%  $\text{HgCl}_2$  solution followed by UV exposure for 15 minutes. Then the medium was filled in it. Methylene blue, waste water sample and bacteria was added to it.

#### Salt bridge

The salt bridge was prepared by dissolving 3% agar in KCl and NaCl. The mixture was boiled for 2 minutes and casted in the PVC pipe. The salt bridge was properly sealed and kept in refrigerator for proper settling. The cathode was placed over the salt bridge.

#### Substrates

In my study, the waste water of biscuit factory mixed with vermicompost are used. Both are collected from Jabalpur. It contains organic matter like starch, glucose, and sucrose which is used by bacteria for growth.

#### Mediator

Methylene blue is a redox indicators act as electron shuttles that are reduced by microorganisms and oxidized by the MFC electrodes thereby transporting the electrons produced via biological metabolism to the electrodes in a MFC.

#### Circuit Assembly

Single chamber was internally connected by salt bridge and externally the circuit was connected with wires which were joined to the two electrodes at its two ends and to the multimeter by another two ends. The potential difference generated by the MFC was measured by using multimeter.

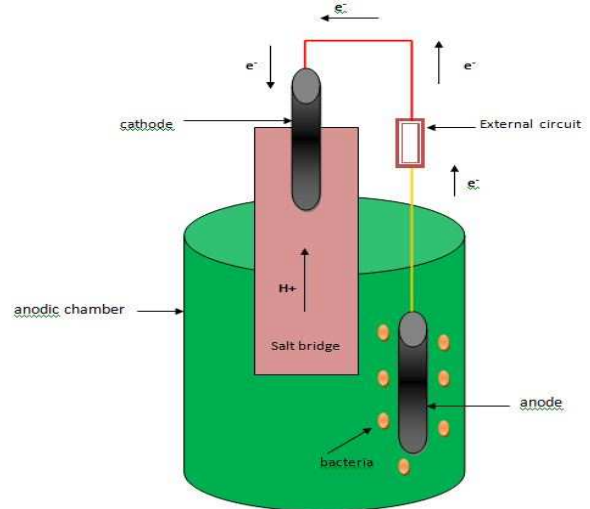


Figure-1- Schematic diagram of Single chamber MFC

### Operation

This research intends to utilize the waste water to generate electricity in Single chamber MFC system. The micro organisms are used as biocatalyst. The bacteria will convert sugar components in the waste water into Carbon dioxide, where in the intermediate process will be released electron generating electricity in MFC system. The salt bridge was cast in a PVC pipe. The cathode was placed over the salt bridge. The substrates (waste water) was added in the anodic chamber. The anodic chamber was completely sealed to maintain anaerobic condition. The voltage generation was recorded at daily basis for bacterial isolate in presence of mediator. The MFC set up was kept at static conditions.

## Results

### Effect on voltage generation by variation in salts concentration.

A single chamber MFC setup was adopted initially with 1M KCl solution to make the salt bridge. After that it was checked for 1M NaCl. Again KCl and NaCl were used in different concentrations such as 2M and 3M for fabricating salt bridge. After comparing the results of different KCl and NaCl concentrations, it was found that the salt bridge madeup of KCl functions better than that of NaCl.


#### 1M KCl and 1M NaCl

In the experiment, 1M KCl and 1M NaCl were used to transport  $\text{H}^+$  ions in the salt bridge. The voltage generation was recorded per day throughout the week for the mixture of biscuit factory substrate and vermicompost. On day 5 the maximum generated voltage obtained with 1M KCl and 1M NaCl was 385mV and 297mV respectively. The MFC was run

for a period of 7 days and readings were noted at regular intervals.

**Table-1.1: Maximum voltage obtained with 1M KCl and 1M NaCl**

Days	Maximum voltage (mV)	
	KCl	NaCl
1	350	218
2	358	232
3	365	250
4	372	276
5	385	297
6	381	284
7	377	265

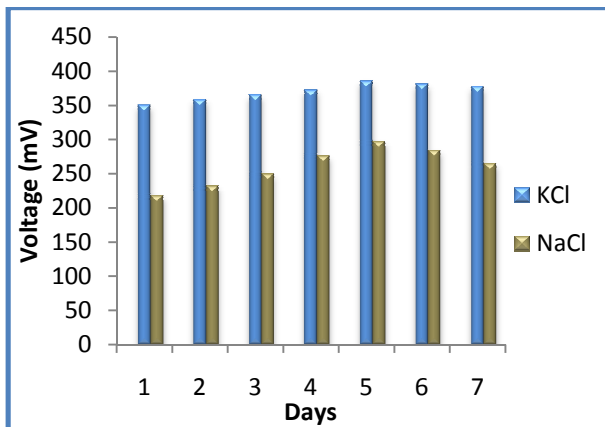


**Graph -1.1: Graph representing voltage generated in Single chamber-MFC for 1M KCl and 1M NaCl with respect to time (in days).**

**2M KCl and 2M NaCl**

In the experiment, 2M KCl and 2M NaCl were used to transport H<sup>+</sup> ions in the salt bridge. The voltage generation was recorded per day throughout the week for the mixture of biscuit factory substrate and vermicompost. On day 4 the maximum generated voltage obtained with 2M KCl and 2M NaCl was 338mV and 209mV respectively. The MFC was run for a period of 7 days and readings were noted at regular intervals.

**Table-1.2: Maximum voltage obtained with 2M KCl and 2M NaCl**

Days	Maximum voltage (mV)	
	KCl	NaCl
1	313	176
2	321	184
3	329	197
4	338	209
5	331	201
6	327	194
7	322	187

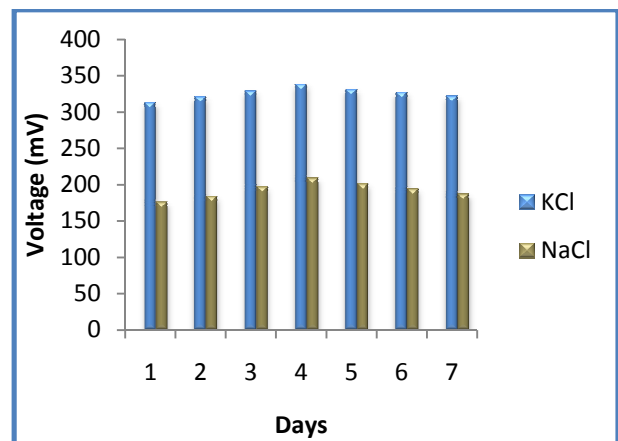


**Graph -1.2: Graph representing voltage generated in Single chamber-MFC for 2M KCl and 2M NaCl with respect to time (in days).**

**3M KCl and 3M NaCl**

In the experiment, 3M KCl and 3M NaCl were used to transport H<sup>+</sup> ions in the salt bridge. The voltage generation was recorded per day throughout the week for the mixture of biscuit factory substrate and vermicompost. On day 5 the maximum generated voltage obtained with 3M KCl and 3M NaCl was 326mV and 199mV respectively. The MFC was run for a period of 7 days and readings were noted at regular intervals.


**Table-1.3: Maximum voltage obtained with 3M KCl and 3M NaCl**

Days	Maximum voltage (mV)	
	KCl	NaCl
1	288	156
2	296	167
3	305	179
4	313	187
5	326	199
6	319	191
7	308	183

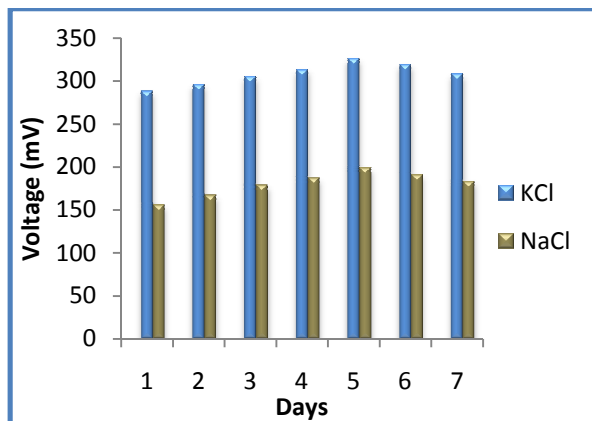**Graph -1.3: Graph representing voltage generated in Single chamber-MFC for 3M KCl and 3M NaCl with respect to time (in days).**



### Discussion

Microbial fuel cell is based upon the basic principle in which biochemical energy is converted into electrical energy. Consumption of organic substrate (e.g. glucose) by microorganism in aerobic condition produce CO<sub>2</sub> and H<sub>2</sub>O.



If the terminal electron acceptor oxygen is replaced by mediator then the electrons will be trapped by mediator, which will get reduced and transport to electrons to the electrode at anodic chamber. However when oxygen is not present

(anaerobic condition) they produce carbon dioxide, protons and electrons as described below [13].



Based on the result, the maximum generated voltage obtained with 1M KCl and 1M NaCl was 385mV and 297mV on day 5. The maximum generated voltage obtained with 2M KCl and 2M NaCl was 338mV and 209mV on day 4. The maximum generated voltage obtained with 3M KCl and 3M NaCl was 326mV and 199mV on day 5.

### Conclusion

Microorganisms that can combine the oxidation of organic biomass to electron transfer to electrodes put forward the self-sufficient systems that can successfully convert waste organic matter and reusable biomass into electricity. Oxidation of these newly rigid sources of organic carbon does not supply net carbon dioxide to the environment and unlike hydrogen fuel cells, there is no requirement for wide pre-handing out of the fuel or for costly catalysts. With the suitable optimization, microbial fuel cells might be able to power an extensive collection of broadly used procedure. Technology of Microbial Fuel Cell is one alternative of energy production using renewable resource.

### References

- [1] Rakesh Reddy N, Nirmal Raman K, Ajay Babu OK and Muralidharan A, Potential stage in wastewater treatment for generation of bioelectricity using MFC, *Current Research Topics in Applied Microbiology and Microbial Biotechnology* 1,322- 326,2007.
- [2] Allen R.M, Bennetto H.P, *Microbial fuel cells: electricity production from carbohydrates*, *Appl Biochem Biotechnol*, 39-40:27-40,1993.
- [3] Derek R.L, *The microbe electric: conversion of organic matter into electricity*, *Current opinion in Biotechnology* 19,564-571,2008.
- [4] Chaudhuri S.K, and Lovley D.R, *Electricity generation by direct oxidation of glucose in mediatorless microbial fuel cells*, *Nature biotechnology* 21, 1229-1232,2003.
- [5] Kim H.J, Park H.S, Hyun M.S, Chang I.S, Kim M and Kim B.H, *A mediator-less microbial fuel cell using a metal reducing*

- bacterium, Shewanella putrefaciens, Enzyme and Microbial Technology* **30**, 145-152,2002.
- [6] Lovley D.R, *Bug juice: harvesting electricitywith microorganisms, Nat Rev Micro* **4**, 497-508,2006.
- [7] Du Z, Li H and Gu T, *A state of the art review on microbial fuel cells: A Promising technology for wastewater treatment and bioenergy, Biotechnology Advances* **25**, 464-482,2007.
- [8] Scholz F, Mario J, Chaudhuri S.K, *Bacterial Batteries, Nature Biotechnology. Vol. 21(10) pp 1151-1152,2003.*
- [9] Mohan V, Roghavalu S, Srikanth G and Sarma P, *Bioelectricity production by mediatorless microbial fuel cells under acidophilic conditions using wastewater as substrate loading rate, Current Science. Vol. 92 (12) pp 1720 – 1726,2007.*
- [10] Logan B.E, Hamelers P, Rozendal R, Schroder U, Keller I, Freugua S, Alterman P, Verstraete W and Rabaey K, *Microbial Fuel Cells: Methodology and Technology, Environmental Science and Technology, Vol. 40: 5181 – 5192,2006.*
- [11] DiBucci J and Boland T, *Turning waste into wealth, the future of microbial fuel cells, Paper #1065, Conference Session #C5, Eleventh Annual Conference, Swanson School of Engineering, University of Pittsburgh,2011.*
- [12] Kim J, Han S, Oh S and Park K, *A Non-Pt Catalyst for Improved Oxygen Reduction Reaction in Microbial Fuel Cells, Journal of the Korean Electrochemical Society,Vol. 14 (2): 71 – 76,2011.*
- [13] Scott K and Murano C, *Microbial fuel cells utilizing carbohydrates, Journal of Chemical Technology and Biotechnology, Vol. 82 pp 92 – 100,2007.*