



INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH TECHNOLOGY

Survey of Acknowledgement based Vector Routing for Opportunistic Networks

Mr. Prashant Rewagad^{*1}, Mrs Dipti Sonawane²

^{*1} GHRIEM, Jalgaon, Department of Computer Science Engineering, India

prashant.rewagad@raisoni.net

Abstract

Opportunistic networks are one of the most challenging area of interest MANETs. Here nodes communicate with each other when they get opportunity because path joining two mobile nodes never exists. Again nodes do not contain any knowledge about the network terminology. If they want to deliver message to the destination the routes are built dynamically furthermore, nodes are not having or possess any knowledge about the network terminology and any intermediate node selected as a next hop which brings the message closer up to the destination. These requirements make opportunistic networks most interesting evolutions of MANETs & challenging and promising research field. In this paper we describe composite approach for routing in opportunistic networks, considering traditional different routing protocols unable to deliver messages between hosts. Thus, there is a need for a path to route from source to destination through such networks. We propose composite approach which combines Epidemic Routing and Probabilistic Routing approaches together. When two hosts come into contact of one another, they exchange their summary vectors to determine which messages stored remotely have not been seen by the local host. In turn, each host then requests copies of messages that it has not yet seen. When message reaches to destination, acknowledgment is sent in the same manner to the sender of the message.

Keywords: Epidemic Routing, Routing Opportunistic networks, Probabilistic Routing..

Introduction

Wireless network infrastructures have been expanding at a rapid pace throughout the world. However, wireless networks may still not be available in areas such as poor regions, underwater sensors, or military operations. In order to provide networking support for situations where there are no communication paths, there opportunistic network can be applied. Opportunistic network is a type of delay tolerant, intermittently connected network using an ad-hoc like structure. When a source node wants to deliver or transfer data to destination node but there does not exist a direct connecting path between them, packets can be forwarded or delivered to intermediate participating nodes which aid in delivering the packet from the source to the destination. Unlike a typical ad-hoc structure, however, opportunistic network assumes there is almost never a fully connected path between source to destination and the intermediate nodes may not encounter other nodes frequently or Consistently [1], [7], [15]. In some cases, intermediate nodes may have to buffer the packets received for a long time. Due to the uncertainty of packet delivery success in opportunistic networks, numerous routing protocols were proposed to maximize packet delivery rate. One

of the most well known routing protocols for opportunistic networks is a protocol called PROPHET [1],[3]. Since the chance of having a directly connected path from a source node to the destination node is rare or non-existent, identifying potential follow. Intermediate carriers for the packets to be transferred are essential. Forwarding data to intermediate carriers that rarely encounter the destination node will, in the worst case, fail to deliver the data. PROPHET [1] uses a predictability value, which is calculated using the history of encounters between nodes to evaluate the packet forwarding preference. While PROPHET has shown decent results [1], there is still room for improvements. Due to the FIFO queuing nature of PROPHET [1], packets may be dropped consistently when packets are forwarded to a few concentrated nodes. Packets may also be lost due to node failures or incomplete transmissions [3], And another protocol is Epidemic routing [2],[4],[11] in which a node A “infects” every contact B with packets that it has that B doesn’t have. A summary vector is typically exchanged between two nodes to determine the missing packets. Epidemic routing is unbeatable from the point of

view of successful delivery as long as the load does not stress the resources (bandwidth, storage).

We present a novel vector routing i.e composite approach for routing in opportunistic network. We propose the use of probabilistic routing [1], and Epidemic Routing [2] using an assumption of non-random mobility of nodes to improve the delivery rate of messages while keeping buffer usage and communication overhead at a low level.

Related Work

Vahdat and Becker present a routing protocol for intermittently connected networks called Epidemic Routing [2]. This protocol based on the theory of epidemic algorithms [4] by doing pair-wise information of messages between two nodes as they get contact with each other to eventually deliver messages to their destination. Hosts buffer messages even if there is currently no path to the destination available. An index of these messages called a summary vector is kept by the nodes, and when two nodes meet they exchange summary vectors. After this exchange, each node can determine if the other node has some message that was previously unseen to this node. In that case, the node requests the messages from the other node. This means that as long as buffer space is available, messages will spread like an epidemic of some disease through the network as nodes meet and “infect” each other. Each message must contain a globally unique message ID to determine if it has been previously seen. Besides the obvious fields of source and destination addresses, messages also contain a hop count field. This field is similar to the TTL field in IP packets and determines the maximum number of hops a message can be sent, and can be used to limit the resource utilization of the protocol. Messages with a hop count of one will only be delivered to their final destination.

The resource usage of this scheme is regulated by the hop count set in the messages, and the available buffer space at the nodes. If these are sufficiently large, the message will eventually propagate throughout the entire network if the possibility exists. Vahdat and Becker do however show that by choosing an appropriate maximum hop count, delivery rates can still be kept high while the resource utilization is lower in the scenarios used in their evaluation [2].

A communication model that is similar to Epidemic Routing is presented by Beaufour *et al.* [5], focusing on data dissemination in sensor networks. The Pollen network proposed by Gance *et al.* [6] is also similar to Epidemic Routing.

Chen and Murphy propose a protocol called Disconnected Transitive Communication (DTC) [7]. It utilizes an application-tunable utility function to locate the node in the cluster of currently connected nodes that it is best to forward the message to base on the needs of the application. In every step, a node searches the cluster of currently connected nodes for a node that is “closer” to the destination, where the closeness is given by a utility function that can be tuned by the application to give appropriate results.

Shen *et al.* propose Interrogation-Based Relay Routing, a routing protocol for routing in ad hoc space networks with Scientific Earth Observing (SEO) satellites [8], characterized by frequently changing topologies, and sparse and intermittent connectivity. The satellites interrogate each other to learn more about network topology and nodal capacity to make intelligent routing decisions.

Work by Li and Rus [9] deal with a similar problem of communication in disconnected networks. They propose a solution where nodes actively change their trajectories to create connected paths to accommodate the data transmission. While this might work in military applications and in some robotic sensor networks, in most scenarios it is not likely that nodes will move just to accommodate communication of other nodes (if it is even possible to communicate the need for it).

Grossglauser and Tse looks at the utility of using the mobility of nodes to deliver messages to their destination from a slightly different point of view. One major problem with ad hoc networks is that due to interference of concurrent transmissions between nodes they scale badly. Grossglauser and Tse show the by only doing local communications between neighbors and instead relying on the movement of nodes to bring a message to its destination, this problem can be mitigated [10].

Probabilistic Routing

Though the random way-point mobility model is popular to use in evaluations of mobile ad hoc protocols, real users are not likely to move around randomly, but rather move in a predictable fashion based on repeating behavioral patterns such that if a node has visited a location several times before, it is likely that it will visit that location again. We would like to make use of these observations and this information to improve routing performance by doing probabilistic routing using History of Encounters and Transitivity [1].

To accomplish this, we establish a probabilistic metric called

delivery predictability, $P(a,b) \in [0,1]$, at every node a for each known destination b . This indicates how likely it is that this node will be able to deliver a message to that destination. When two nodes meet, they exchange summary vectors which in this case also contain the delivery predictability information stored at the nodes. This information is used to update the internal delivery predictability vector as described below, and then the information in the summary vector is used to decide which messages to request from the other node based on the forwarding strategy used.

A. Delivery predictability calculation [1]

The calculation of the delivery predictabilities has three parts. The first thing to do is to update the metric whenever a node is encountered, so that nodes that are often encountered have high delivery predictability. For this calculation refer to “(1)”, where $P_{init} \in [0, 1]$, is an initialization constant.

$$P(a,b) = P(a,b)_{old} + (1 - P(a,b)_{old}) \times P_{init}. \quad (1)$$

If a pair of nodes does not encounter each other in a while, they are less likely to be good forwarders of messages to each other, thus the delivery predictability values must age, being reduced in the process which is calculated in aging equation. Refer to “(2)”, where $\alpha \in [0,1]$ is the aging constant, and k is the number of time units that have elapsed since the last time the metric was aged. The time unit used can differ, and should be defined based on the application and the expected delays in the targeted network.

$$P(a,c) = P(a,c)_{old} + (1 - P(a,c)_{old}) \times P(a,b) \times P(b,c) \times \beta. \quad (3)$$

Epidemic Routing

Epidemic Routing [2], [4] supports the eventual delivery of messages to arbitrary destinations with minimal assumption regarding the underlying topology and connectivity of the underlying network. In fact, only periodic pair-wise connectivity required to ensure eventual message delivery. The Epidemic Routing protocol works as follows. The protocol relies upon the transitive distribution of messages through ad hoc networks, with messages eventually reaching their destination. Each host maintains a buffer consisting of messages that it has originated as well as messages that it is buffering on behalf of other hosts. For efficiency, a hash table indexes this list of messages, keyed by a unique identifier associated with each message. Each host stores a bit vector

called the summary vector that indicates which entries in their local tables are set. When two hosts come into communication range of one another, the host with the smaller identifier initiates anti-entropy session (this term is borrowed from the literature [22]) with the host with the larger identifier. To avoid redundant connections, each host maintains a cache of hosts.

Anti-entropy is not re-initiated with remote hosts that have been contacted within a configurable time period. During anti-entropy, the two hosts exchange their summary vectors to determine which messages stored remotely have not been seen by the local host. In turn, each host then requests copies of messages that it has not yet seen. In the design for Epidemic Routing associates a unique message identifier, a hop count, and an optional ack request with each message.

The message identifier is a unique 32-bit number. This identifier is a concatenation of the host's ID and a locally-generated message ID (16 bits each). However, if hosts in an ad hoc network are assigned the same subnet mask, the remaining bits of the IP address can be used as the identifier. In this implementation, the hosts in the ad hoc network are statically assigned ID's. The hop count field determines the maximum number of epidemic exchanges that a particular message is subject to. While the hop count is similar to the TTL field in IP packets, messages with a hop count of one will only be delivered to their end destination. Larger values for hop count will distribute a message through the network more quickly. This will typically reduce average delivery time, but will also increase total resource consumption in message delivery. Thus, high priority messages might be marked with a high hop count, while most messages can be marked with a value close to the expected number of hops for a given network configuration to minimize resource consumption [2], [4], [11], [13].

Composite Vector Routing Approach

Composite Vector routing protocol is a novel approach for routing in opportunistic network. In this approach we combine both the Epidemic Routing and Probabilistic Routing. A node forwards the message to the two neighbours which are having maximum delivery predictability.

Delivery predictability, $P(a,b) \in [0,1]$, at every node a for each known destination b is ability of a to deliver message to destination b . which in this

case also contain the delivery predictability information stored at the nodes. This information is used to update the internal delivery predictability vector, and then the information in the summary vector is used to decide which messages to request from the other node as described below. Each host maintains a buffer consisting of messages that it has originated as well as messages that it is buffering on behalf of other hosts. A hash table indexes this messages, keyed by a unique identifier associated with each message. Each host stores a bit vector called the summary vector that indicates which entries in their local hash tables are set. To avoid redundant connections, each host maintains a cache of previously communicated hosts. When two hosts come into communication range of one another, they exchange their summary vectors to determine which messages stored remotely have not been seen by the local host. In turn, each host then requests copies of messages that it has not yet seen. When message reaches to destination, acknowledgment is sent in the same manner to the sender of the message. For example, while sending the message the source node searches the nodes in his range, then by exchanging delivery predictability information he finds MN1 and MN2 have higher delivery predictability than other nodes therefore source node forwards message to nodes MN1 and MN2 as shown in fig. (a). The nodes who receive the message from source node they again follow the same procedure as source node but as shown in fig (b) MN2 is receiver of source as well as node MN1. MN1 and MN2 only exchange its summary vector. And by exchange they know that they don't have new messages to exchange so they communication. In fig. (c) The node MN4 follows same procedure and message reaches to the destination.

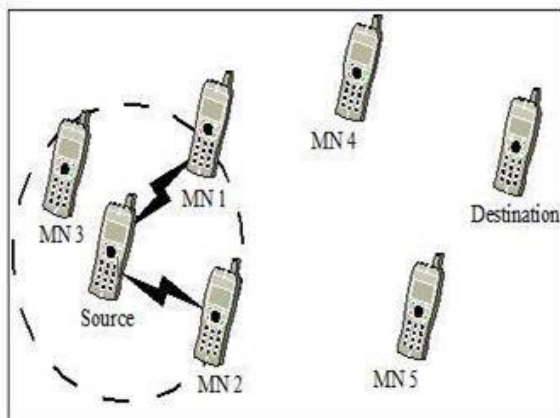


Fig.1 (a) Composite Routing

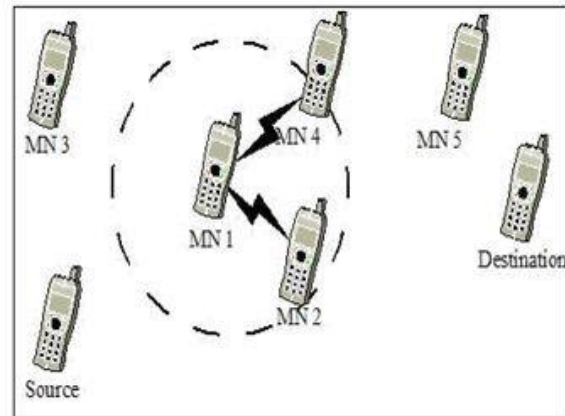


Fig.1 (b) Composite Routing

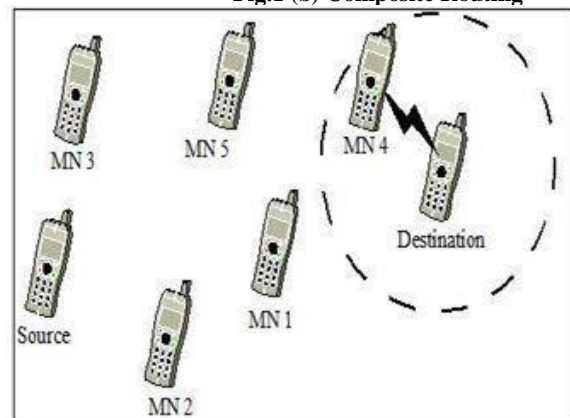


Fig.1 (c) Composite Routing

Advantages

- Increased message delivery than probabilistic model.
- Considerable reduction in resource consumption than epidemic model.
- Black hole attack is almost removed since a message is sent to two different nodes having higher delivery predictability.

Conclusion

Opportunistic network is an emerging system that is getting growing interest in networking research community. The opportunistic network places different research challenges on different layers of a protocol stack. In this paper, we provide composite routing approach for opportunistic network, which is made with taking features of epidemic and probabilistic routing techniques, which results in improved message delivery and low overhead on resources.

Future Work

In proposed work delivery predictability is calculated by using three metrics as-number of encounters between nodes, time span between their meetings and transitive property of delivery predictability.

It will be interesting to evaluate delivery predictability by using different metrics like context information and history of nodes.

References

- [1] Probabilistic routing in intermittently connected networks. *SIGMOBILE Mob. Comput. Commun. Rev.* 7(3):19–20, 2003.
- [2] Amin Vahdat and David Becker. “Epidemic routing for partially connected ad hoc networks”. *Technical Report CS-200006, Duke University, April 2000.*
- [3] Ting-Kai Huang, Chia-Keng Lee, Ling-Jyh Chen “PRoPHET+: An Adaptive PRoPHET-Based Routing Protocol for Opportunistic Network”. *IEEE Proceedings, 2011.*
- [4] Werner Vogels, Robbert van Renesse, and Ken Birman. “The power of epidemics: robust communication for large-scale distributed systems”. in *proceedings of first workshop on hot topics in networks (HotNets-I), 28-29 October 2002, Princeton, New Jersey, USA, oct 2002.*
- [5] Allan Beaufour, Martin Leopold, and Philippe Bonnet. “Smart-tag based data dissemination”. in *First ACM International Workshop on Wireless Sensor Networks and Applications (WSNA02), June 2002.*
- [6] Natalie Glance, Dave Snowdon, and Jean-Luc Meunier. “Pollen: using people as a communication medium”, *Computer Networks*, vol. 35, no. 4, pp. 429–442, March 2001.
- [7] Xiangchuan Chen and Amy L. Murphy. “Enabling disconnected transitive communication in mobile ad hoc networks”. in *Proc. of Workshop on Principles of Mobile Computing, collocated with PODC’01, Newport, RI (USA), aug 2001, pp. 21–27.*
- [8] Chien-Chung Shen, Girish Borkar, Sundaram Rajagopalan, and C haiporn Jaikaeo. “Interrogation-based relay routing for ad hoc satellite networks”. in *Proceedings of IEEE Globecom 2002, Taipei, Taiwan, November 17-21, 2002.*
- [9] Qun Li and Daniela Rus. “Communication in disconnected ad-hoc networks using message relay”. *Journal of Parallel and Distributed Computing*, 2003.
- [10] Matthias Grossglauser and David Tse. “Mobility increases the capacity of ad-hoc wireless networks”. *IEEE/ACM Transactions on Networking*, vol. 10, no. 4, Aug 2002.
- [11] Ram Ramanathan, Richard Hansen, Prithwish Basu. “Prioritized epidemic routing for opportunistic networks”. *MobiOpp’07, June 11, 2007, San Juan, Puerto Rico, USA. Copyright 2007 ACM 978-1-59593-688-2/07/0006.*
- [12] Anders Lindgren, Avri Doria, and Olov Schel’en. “Poster: Probabilistic routing in intermittently connected networks”. in *Proceedings of The Fourth ACM International Symposium on Mobile Ad Hoc Networking and Computing (MobiHoc 2003), June 2003.*
- [13] Chung-Ming Huang, Kun-ghan Lan and Chang-Zhou Tsai. “A Survey of opportunistic networks”. *22nd International Conference on Advanced Information Networking and Applications, Workshops, 978-0-7695-3096-3/08 IEEE DOI 10.1109/WAINA.2008.292.*
- [14] Elizabeth M. Royer and Chai-Keong Toh. “A Review of current routing protocols for ad hoc mobile wireless networks”. *IEEE Personal Communications Magazine*, vol. 6, no. 2, pp. 46–55, Apr. 1999.
- [15] Leszek Lilien, Zille Huma Kamal, Vijay Bhuse, and Ajay Gupta. “Opportunistic networks: The concept and research challenges in privacy and security”.
- [16] P. Marshall. *The disruption tolerant networking program*, 2005. <http://www.darpa.mil/sto/solicitations/DTN/briefs.htm>.
- [17] S. Burleigh et al. “Delay-tolerant networking: An approach to interplanetary internet”. *IEEE Communications Magazine*, June, 2003.
- [18] A. Pentland, R. Fletcher, and A. Hasson. “Daknet: Rethinking connectivity in developing nations”. *IEEE Computer* 37(1), 78–83, Jan 2004.
- [19] P. Jacquet T. Clausen. “Optimized link state routing protocol (olsr)”. October 2003. *Internet RFC 3626.*

- [20]E.W. Dijkstra. "A note on two problems in connection with graphs". *Numer. Math.* 1:269, 271, 1959.
- [21]Douglas B. Terry, Marvin M. Theimer, Karin Petersen, Alan J. Demers, Mike J. Spreitzer, and Carl H. Hauser. "Managing Update Conflicts in Bayou, a Weakly Connected Replicated Storage System". In *Proceedings of the fifteenth ACM symposium on Operating systems principles*, pages 172–183, December 1995.
- [22]J. Burgess, B. Gallagher, D. Jensen, and B. N. Levine. "Maxprop: Routing for vehicle-based disruption-tolerant networks". In *Proc. IEEE INFOCOM*, pages 1–11, 2006.
- [23]J. LeBrun, Chen-Nee Chuah, D. Ghosal, and M. Zhang. "Knowledge based opportunistic forwarding in vehicular wireless ad hoc networks". In *Vehicular Technology Conference, 2005. VTC 2005-Spring. 2005 IEEE 61st, volume 4*, pages 2289–2293 Vol. 4, May-1 June 2005.
- [24]J. Leguay, T. Friedman, and V. Conan. "Evaluating mobility pattern space routing for dns". In *INFOCOM 2006. 25th IEEE International Conference on Computer Communications. Proceedings*, pages 1–10, Barcelona, Spain, April 2006.
- [25]Daddy Marasigan and Papa Rommel. "My routing and capacity building in disruption tolerant networks". In *INFOCOM 2005. 24th Annual Joint Conference of the IEEE Computer and Communications Societies. Proceedings IEEE, volume 1*, pages 398–408 vol. 1, March 2005.
- [26]M. Musolesi, S. Hailes, and C. Mascolo. "Adaptive routing for intermittently connected mobile ad hoc networks". In *World of Wireless Mobile and Multimedia Networks, 2005. WoWMoM 2005. Sixth IEEE International Symposium on a*, pages 183–189, June 2005.
- [27]T. Spyropoulos, K. Psounis, and C. S. Raghavendra. "Single-copy routing in intermittently connected mobile networks". In *Sensor and Ad Hoc Communications and Networks, 2004. IEEE SECON 2004. 2004 First Annual IEEE Communications Society Conference on*, pages 235–244, 2004.
- [28]Yong Wang, Sushant Jain, Margaret Martonosi, and Kevin Fall. "Erasure coding based routing for opportunistic networks". In *WDTN '05: Proceedings of the 2005 ACM SIGCOMM workshop on Delay-tolerant networking*, pages 229–236, New York, NY, USA, August 2005. ACM.
- [29]J'org Widmer and Jean-Yves Le Boudec. "Network coding for efficient communication in extreme networks". In *WDTN '05: Proceedings of the 2005 ACM SIGCOMM workshop on Delay-tolerant networking*, pages 284–291, New York, NY, USA, 2005. ACM.
- [30]Chien-Shiu Lin, Wei-Shyh Chang, Ling-Jyh Chen, and Cheng-Fu Chou. "Performance study of routing schemes in delay tolerant networks". In *AINAW '08: Proceedings of the 22nd International Conference on Advanced Information Networking and Applications - Workshops*, pages 1702–1707, Washington, DC, USA, 2008. IEEE Computer Society.