



## INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH TECHNOLOGY

### Performance and Emission Characteristics of a Four Stoke Diesel Engine Operated by Neem Biodiesel Blended with Diesel

Dr V Naga Prasad Naidu\*, Prof. V.Pandu Rangadu

Principal, Intellectual Institute of Technology, Anantapuramu, A.P, India

Professor of Mech Engg., JNTUCEA, Ananthapuramu, A.P, India

#### Abstract

Industrialization and motorization of the world has led to a steep rise in the demand for petroleum products and other side the fast depletion of fossil fuel reserves and issues like global warming have led the researchers all over the world to search for an alternative fuels. Among various options one of the best alternative fuel is Biodiesels obtained from Vegetable oils. The present study focuses on Evaluation of performance and emission characteristics of a single cylinder four stroke diesel engine with different blends (B05, B10, B15, B20 and B25 in comparison to diesel) of Neem biodiesel and Diesel. The performance is compared with diesel fuel, on the basis of brake specific fuel consumption, brake thermal efficiency, exhaust gas temperature and emissions of hydrocarbons and oxides of nitrogen. From the experimental Results it is observed that the neem biodiesel blend B20 have closer performance to diesel and hydrocarbon and carbon monoxide emissions are less than diesel.

**Keywords:** Bio Diesel, Performance, Emissions, Hydro Carbons, Neem oil.

#### Introduction

The world has witnessed the fuel shortage, fuel price rise, global warming, ozone layer depletion and other environmental problems. This is because of huge consumption of fossil fuel in transport, power and agricultural sectors. If this situation continues there is every chance for the scarcity of petroleum products. A major solution to reduce this problem is to search for an alternative fuels. Vegetable oils can be used as an alternative to the diesel oil, since they are renewable and can be produced in rural areas [1]. The inventor of diesel engine Rudolf diesel predicted that the plant based oils are widely used to operate diesel engine. The vegetable oils has great potentials as alternative fuel to diesel fuel [2]. But several researchers found that the use of pure vegetable oil can cause numerous engine related problem such as injector choking, piston deposit formation and piston ring sticking due to higher viscosity and low volatility [3]. An effective method of using vegetable oils in diesel engine is by modifying the vegetable oils into its monoesters by transesterification [4]. Transesterification of oils provides a significant reduction [5] in viscosity, thereby enhancing their physical and chemical properties and improve the engine performance. Though the biodiesel has several advantages over

pure vegetable oil, it's disadvantages like low calorific value, higher viscosity, poor cold flow properties as compared with diesel. This drawback may be managed with the employment of blended fuel of biodiesel and diesel fuel. The present study aims to investigate the use of neem oil biodiesel blended with diesel as an alternate fuel for compression ignition engine.

#### Technical specifications of the engine

In this work experiments were conducted on 4 stroke, single cylinder, C.I engine (Kirloskar Oil Engineers Ltd., India) of maximum power-3.68 KW with AVL smoke meter and Delta 1600 S gas analyser.

#### Material and methods

In the present work engine tests were conducted with Neem Biodiesel blended with Diesel (B05, B10, B15, B20, and B25 in comparison to diesel) to evaluate performance and emission characteristics. Neem oil is a vegetable oil [6] produced from neem seeds of neem tree. Neem (*Azadirachta indica*) is a tree in the mahogany family Meliaceae which is abundantly grown in varied parts of India. Neem oil has several outstanding

advantages among other oils. Neem plant is traditionally used for agricultural and medicinal purposes. These can grow on poor soils and areas of low rainfall. Neem seeds obtained from neem tree are de-pulped, sun dried and crushed for oil extraction. The seeds have 45% oil which has high potential for the production.

The various properties of the above bio diesel [7] are presented in table 1.

**Table 1: Properties of fuels used**


Properties	Neem biodiesel	Diesel
Density (kg/m <sup>3</sup> )	912	830
Calorific Value (kJ/Kg)	39450	43000
Viscosity @400C(cSt)	5.2	2.75
Cetane Number	48	51
Flash Point (°C)	130	74

**Results and discussion**

The results of the experimental work are presented below

**Brake thermal Efficiency**

The Figure 1 shows the variation of brake thermal efficiency with break power output. In general the brake thermal efficiency of engine depends on the combustion process which is complex phenomenon that is influenced by several factors of

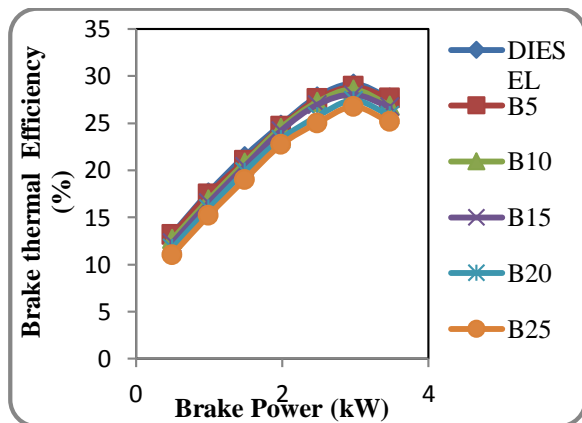


**Figure 1: Variation of Brake thermal efficiency with power output for diesel and Neem biodiesel blends.**

the combustion process which is a complex phenomenon that is influenced by several factors such as design of combustion chamber, type of

injection nozzle, injection pressure, spray characteristics and fuel characteristics such as cetane number, volatility, viscosity, homogeneous mixture formation, latent heat of vaporization, calorific value etc. It is evident that diesel fuel has the higher brake thermal efficiency compared to Neem biodiesel blends. The diesel fuel has the highest thermal efficiency because of its calorific value and low viscosity as compared with Neem biodiesel. With the higher calorific value the amount of heat produced in the combustion chamber is more, further the combustion is complete and produced higher temperatures. The efficiency of diesel is 29.18%, where as for Neem biodiesel blends B5, B10, B15, B20 and B25 is 28.85%, 28.54%, 28% 27.43% and 26.58% respectively.

**Brake specific Fuel Consumption**

The variation of brake specific fuel consumption (BSFC) with break power is shown in Figure 2. The BSFC reduced with the load for all the fuels. It is found that the specific fuel consumption for the blend is higher than diesel at all loads. This is because of the combined effects of lower heating value and the higher fuel flow rate due to high density of the blends. Higher proportions of Neem oil in the blends increases the viscosity which in turn increased the specific fuel consumption due to poor atomization of the fuel. The oxygenated biodiesels may lead to the leaner combustion resulting in higher BSFC.

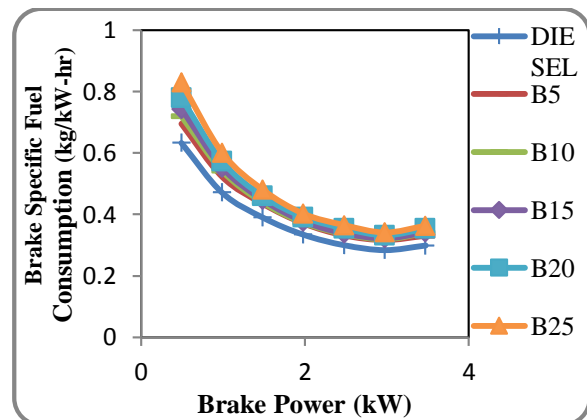

**Figure.2: The variation of Brake specific fuel consumption with power output for diesel and Neem biodiesel blends.**

**Exhaust Gas Temperature**

The Figure 3 shows the variation of Exhaust gas temperature with break power output. Exhaust gas temperature was found to increase in both

concentration of biodiesel in blends and engine load. The exhaust gas temperature rises from 110°C at no load to 350°C for various blends. The increase in EGT with engine load is due to the fact that a higher amount of fuel is required in the engine to generate extra power needed to take up conditional loading. Exhaust gas temperature for B-25 is highest. For the diesel fuel the exhaust gas temperature is lowest among all biodiesel blends. The exhaust gas temperature for the diesel at the rated load is 320°C, for B20 is 338°C. Though the viscosity for the Neem oil is higher it is compensated by the calorific value of the fuels.

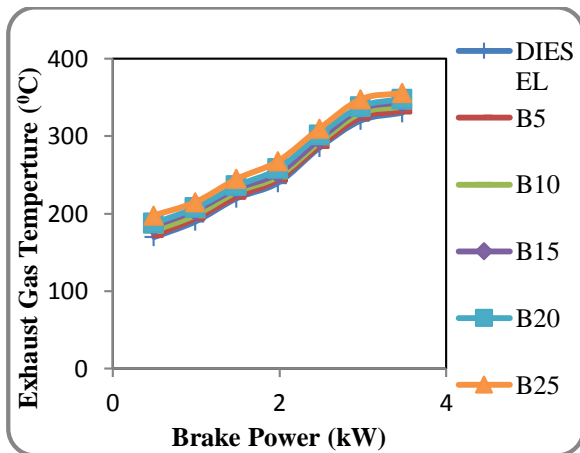


Figure 3: Variation of Exhaust gas temperature with power output for diesel and Neem biodiesel blends.

**Smoke Density**

The variation of the smoke densities with power output is shown in Figure 4. The smoke emission increased with the increase of engine load. This is compensated up to certain extent due to the absence of aromatics and presence of inherent oxygen molecules in the bio diesel. These oxygen particles helps to promote stable and complete combustion by delivering oxygen to the combustion zone of burning fuel by reducing locally rich region and limit primary smoke formation and lower smoke emissions. For all loads the smoke density of the biodiesel blends were always higher than that of diesel fuel. The smoke density increases due to insufficient combustion and higher ignition delay. The biodiesel blend has high viscosity, larger fuel droplet sizes and decrease in fuel air mixing rate. These are the factors involved to increase the smoke density of biodiesel blends. The fuel blend B25 gives high smoke emission than all the other used fuels.

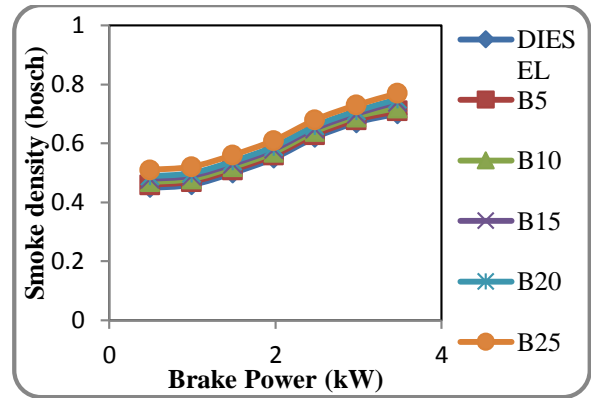


Figure 4: Variation of Smoke density with power output for diesel and Neem biodiesel blends.

**Carbon Monoxide Emissions (CO emissions)**

The variation of carbon monoxide emissions for with brake power is illustrated in Figure 6. It has been observed that the CO emissions are increased with increase in engine load and decrease with the increase in proportion of biodiesel in the blends. The lower CO emission of biodiesel compared to diesel fuel is due to the presence of oxygen in biodiesel which helps in complete oxidation of fuel.

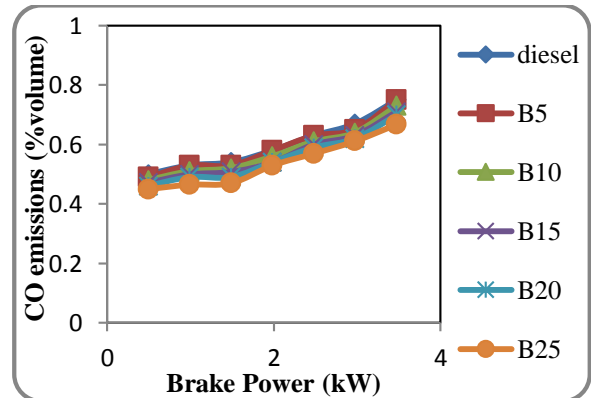


Figure 5: Variation of CO emission with power output for diesel and Neem biodiesel blends.

**Hydrocarbon emissions**

The variation of hydrocarbon emissions with break power is shown in Figure 5. The HC emissions depend upon mixture strength i.e. oxygen quantity and fuel viscosity in turn atomization. . The HC emission will increases with increase in load on the engine for all fuel samples and reduces with increase in quantity of Neem biodiesel in the blend. The oxygen content within the biodiesel is more as compared with diesel. This excess oxygen helps to

better combustion biodiesel blends within the combustion. So that the HC emissions are lower for biodiesel blends as compared with diesel fuel. The HC emission for diesel oil is 76 ppm and for Neem biodiesel blends B20 is 72 ppm and for B25 it is 70 ppm.

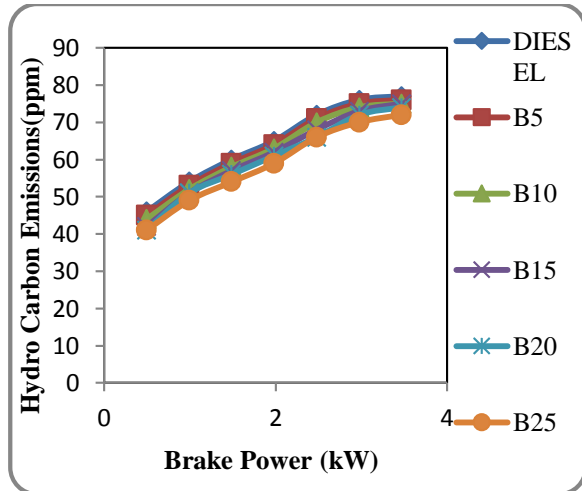


Figure 6: Variation of HC emission with power output for diesel and Neem biodiesel blends.

### Nitrogen oxide Emissions

The variation of Nitrogen oxide emissions is illustrated in Figure 7.

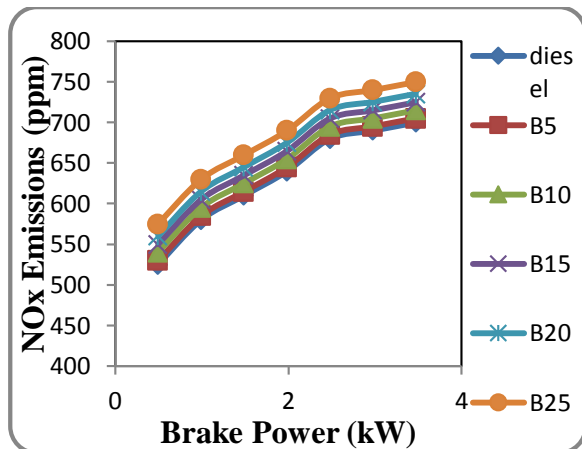


Figure 7: Variation of HC emission with power output for diesel and Neem biodiesel blends.

The NOx emissions are higher for blend as compared with diesel fuel. The increase of NOx in the emissions may be associated with the oxygen content of the biodiesel, since the biodiesel fuel provided additional oxygen for NOx formation. Thus

one of the main reasons for the formation of NOx is the higher availability of oxygen in the combustion chamber.

### Conclusions

The following conclusions are drawn based on the experimental results of the above work:

- The brake thermal efficiency of the engine depends majorly on the heating value and viscosity. The brake thermal efficiency of B20 is nearer to the diesel fuel.
- The BSFC for diesel is lower as compared with neem biodiesel blends
- The exhaust gas temperature is higher for neem biodiesel blends.
- The smoke density is higher for neem biodiesel blends
- The Hydrocarbon emissions of Neem oil biodiesel blends are less than diesel fuel
- The CO emissions are lower for bio diesel blends due to presence of oxygen.
- The NOx emissions increase with increase in concentration biodiesel in blend due to high temperature.

Finally it is concluded that the blend of neem bio diesel- B20 is the optimum blend for Diesel engines for better performance and emissions. The Neem oil biodiesel can be used as alternative to diesel

### Acknowledgment

Authors thank authorities of Intellectual Institute of Technology and Intell Engineering College Anantapuramu, AP, India for providing facilities for carrying out research work.



### References

- [1] Cummins, C., Lyle, Jr. (1993). *Diesel's Engine, Volume 1: From Conception to 1918*. Wilsonville, OR, USA: Carnot Press, ISBN 978-0-917308-03-1.
- [2] Agarwal A.K and Das L.M, *Bio diesel development and characterization for use as a fuel in CI engine*, Transaction of ASME 2001-123, 440- 447
- [3] Bari, S., Lim, T.H., Yu, C.W. (2002). *Effect of preheating of crude palm oil on injection system*
- [4] MK Senthil, A Ramesh, *Performance studies on CI Engine using methyl ester of Jatropa*

- as afuel, XVI National conference on IC Engines-calcutta, India-2000:89-94
- [5] Plank C E lobeer, Quality control vegetable oil Methyl esters used as diesel fuel substitute, Journal of high resolution chromatography-1992.
- [6] Bio energy Technology (BE) World Renewable Energy Congress-2011 Sweden, 8-13 May 471-478
- [7] Report of the committee on Development of Bio fuels-Planning Commission, Government of India.

	Anantapuram, Worked as Principal, JNTU College of Engineering Pulivendula, Member of Various Reputed professional bodies Published nearly 180 papers in various national/International conferences and journals Guided for 15 PhD Student for the Award of PhD degree.
--	--

**Author Bibliography**

	<p><b>Dr. V. Naga Prasad Naidu</b>                  Principal, Intellectual Institute of Technology, Gotkur (V), Kuderu (Mandal), Anantapuramu-515711.                  Qualifications: B.E. (Mechanical) from University of Madras, Chennai T.N. Indian, M.Tech (Heat Power R &amp; A/c) from J.N.T. University, Hyd, A.P., Ph.D., (Hybrid Composites) from S.K. University, Anantapur, A.P. Research Work:                  1) Worked on topic "Hybrid Composites" The nature of this work is to develop Hybrid composites by the use of both Natural and Synthetic fibre to improve mechanical properties and thermal properties and this work has attempted at Department of Polymer science and Technology, Sri Krishnadevaraya University, Anantapur, A.P.                  2) Worked on topic "An experimental investigations on Four stroke Diesel Engine Bio Diesel"- Experiments were carried out on four stroke diesel engine with different Biodiesels separately to evaluate its performance and emission characteristic.                  Published nearly 30 papers in various national/International conferences and journals.</p>
	<p><b>Prof. V. Pandu Rangadu</b>                  Professor in Mechanical Engineering, JNTU College of Engineering Anantapuram, AP, India, Earlier worked as Head of Mechanical Engineering, JNTU College of Engineering</p>