

**INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & RESEARCH  
TECHNOLOGY****X-RAY SENSING BY MERCURY POLYMER COMPOSITES****Sweta Chauhan, Kulvinder Singh**

\*Department of Applied Sciences and Humanities, Ganga Technical Campus, Bahadurgarh, Haryana  
Department of Physics, Deen Dayal Upadhyaya College, Sector-3, Dwarka, New Delhi 110078,  
University of Delhi, INDIA

**ABSTRACT**

Mercury Glasses were subjected to X-Ray sensing studies. These glasses were prepared by physical mixing using ultra sonic waves (3.2MHz). Hard sheets obtained after settling period. Repeated X-ray pulses were given to these sheets, and photocurrent is recorded to study their switching behavior. These glass sheets are found to sense the existence of X-rays. Switching studies reveal their unusual behavior with increasing electric field. They are found to show the decreasing trend in the maximum to minimum current when exposed to X-rays repeatedly with increasing field. This behavior is attributed to the polarization of conducting metal particles in the surrounding of non-conducting polymer.

**KEYWORDS:** X-ray Sensing, Polymers, Photocurrent.

**INTRODUCTION**

X-ray imaging techniques like X-ray computed axial tomography (CAT-scanning), radiovisiography (RVG) etc. are important diagnostic techniques of modern time. The focus of development in these techniques is on reduced X-ray dose to the patient. [1-4]. Apart from medical diagnostic, X-ray imaging is also used in applied mineralogy [5]. These techniques make use of sensitive X-ray detectors. Advanced machines are using solid state detectors which can operate at room temperature. One of the important requirements is very low room temperature noise. Further these detectors should have fast switching. It means when X-rays are on, photocurrent produced in the detector material should increase fast and have high value. Similarly when X-rays are off, current through detectors should go down fast. Many solid state detectors like alpha-selenium, cadmium zinc telluride mercuric-iodide, lead-iodide, cadmium-iodide etc. are found to be good detectors [6]. Single crystals of this material are excellent detectors in terms of quantum efficiency and switching characteristics. However they have limited mechanical flexibility in designing the detectors. More-over they are sensitive to purity issues. As impurities and grain boundaries cause damage to their efficiency. Processes involved after single crystal growth such as cutting, polishing, electrodes formations etc. further cause mechanical damage to the crystals. In order to enhance its mechanical properties and design flexibility, metal-polymer composites are promising options [7]. Many metal-polymer composites were found to possess extraordinary properties like high mechanical strength [8-9].

**EXPERIMENTAL**


Mercury-poly-methyl-methacrylate composites (Hg-PMMA) were prepared by vigorous mixing of liquid mercury (99% pure) with PMMA in chloroform (99% Fisher Scientific India) using ultrasonics of frequency 3.2 MHz. Uniform mixtures were left to settle for nearly 48Hr. It was found that mercury proportion up to 15% by weight mix-up uniformly. Beyond this mercury granules are left unmixed even after prolonged mixing. Density of these composites were found in the range 2-3.8g/cc. These composite sheets are mechanically hard. Samples of 1cm X 0.5 cm are cut and subjected to X-ray switching studies. X-ray source with copper target is used. X-ray generator is operated at 30KV (nickel-filtered) with 10mA plate current. For X-ray beam chopping, switching rotor device was used. For blocking X-rays 4mm semicircular lead disc was used. Rotation is controlled by a stepper motor using microprocessor P89C51RD2. Photocurrent was recorded by Keithley 6485 pico-meter.

**RESULTS AND DISCUSSION**

Composite sheets were found to have low photocurrent ( $\sim 1.5 \times 10^{-11} \text{A}$ ) under the electric field  $1.3 \times 10^4 \text{V/m}$  at room temperature ( $\sim 300\text{K}$ ). Switching curves were obtained at varying electric field through the sample. Photocurrent is found to increase under X-Ray 'on' mode and becomes minimum when X-rays are made 'off'.

When an X-ray photon is absorbed by the material two major phenomenon occur i.e. Multiple production of electron-hole pairs as energy is high Recombination of electron-hole pairs due to defects and impurities present in the material. Photocurrent developed under X-ray exposure depends on (1) Quantum efficiency of material, (2) Area exposed, (3) Reflectance co-efficient, (4) intensity-wave length product and (5) thickness of sample.

Number of actual charge generation under x-ray exposure is directly proportional to the electric field applied. However experimental data obtained show that maximum (when x-rays are on) to minimum current (when X-rays are off) ratio ( $I_{Max}/I_{min}$ ) decreases on increasing the electrical field applied to composite sample [Fig.1].

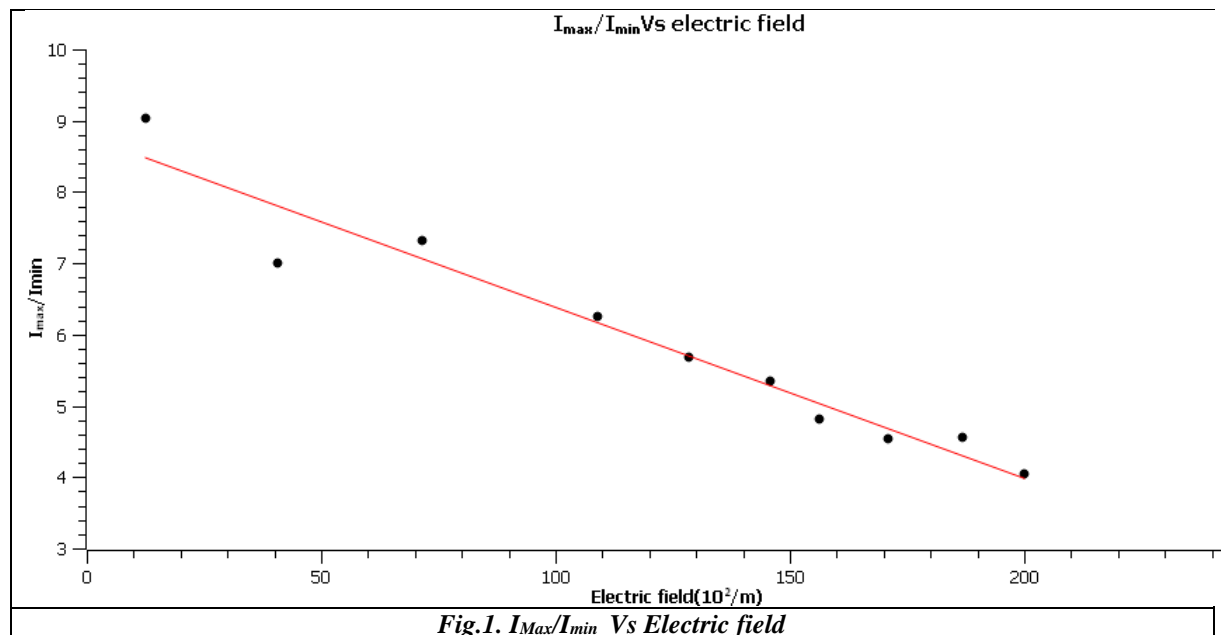

Metal-polymer composites are found to exhibit unusual properties. These composites contain conductive filler dispersed in an insulating polymer matrix. It was shown [10] that the fillers have sharp surface tips. The electric field strength at these tips is very high and results in field assisted tunneling (Fowler–Nordheim tunnelling [11]). Conducting metal particles are covered by the non-conducting polymer. Overall resistivity is high. In the presence of X-rays these conducting particle get excited. This increases the photocurrent. When X-rays are made off, field generated could not release itself in absence of the conducting path through the composite(polarization effect). This keeps the dark current ( $I_{min}$ ) on higher side. With the increase in the electric field this effects becomes stronger. As a result  $I_{max}/I_{min}$  decreases with increasing field.

### ACKNOWLEDGEMENTS

The author wish to thank director Mr. Brahms Singh, of Lorgueil Physics Centre (Delhi) for financial support of this project. We are also thankful to Mr. Ganesh for assisting in the lab work.

### REFERENCES

- [1] Oluwadamilola O.Taiwo, Donal P.Finegan, Jeff Gelb, Christian Holzner, Daniel J.L.Brett, Paul R.Shearing “The use of contrast enhancement techniques in X-ray imaging of lithium-ion battery electrodes” Chemical Engineering Science 154(2016)27–33
- [2] Oliva P.a.c., Golosio B.b.c, Masala G.L.a, Schoonjans T.a, Brunetti A.b.c, Carpinelli M “ New techniques in X-ray Imaging” Physics Procedia 62 ( 2015) 3 – 10
- [3] Robert Pauley “Meet the New Intraoral Sensor” hygienetown.com 2016, 69
- [4] Van˜o E, Fern´andez JM, Ten JI, Prieto C, Gonz´alez L, Rodr´ıguez R, de Las Heras H. Transition from screen–film to digital radiography: Evolution of patient radiation doses at projection radiography. Radiology.2007;243:461–6.
- [5] J.F.W. Mosselmans,, C.I. Pearce , W.R. Bower , R.A.D. Patrick , S.W.T. Price, A.M. Beale, A.P. Sims , And L. Barrio “Microscopic x-ray imaging techniques applied to mineral systems and catalyst particles” The Clay Minerals Society Workshop Lectures Series, Vol. 21 (2016), Chapter 6, 65 –77



- 
- [6] K.Singh, M. Saxena (2011) "Fabrication and Time degradation study of Mercuric Iodide Single crystals X-Ray detector" *J.Nano-Electron, Phys.* 3, 1 , 802- 807
  - [7] *MA McEvoy, N Correll. Science* 347 (6228), 1261689, 2015. 40
  - [8] Rathi, Akshat (2014-02-03). "New laser-printed material is lighter than water as strong as steel". *Ars Technica*. Retrieved 2014-02-14.
  - [9] Bauer, J.; Hengsbach, S.; Tesari, I.; Schwaiger, R.; Kraft, O. (2014). "Highstrength cellular ceramic composites with 3D microarchitecture". *Proceedings of the National Academy of Sciences*.doi :10.1073/pnas.1315147111.
  - [10] D Bloor, K Donnelly, P J Hands, P Laughlin and D Lussey "A metal–polymer composite with unusual properties" 2005 *Journal of Physics D: Applied Physics*, Volume 38, Number 16.
  - [11] Forbes, Richard G.; Deane, Jonathan H.B. (2007). "Reformulation of the standard theory of Fowler–Nordheim tunnelling and cold field electron emission". *Proceedings of the Royal Society A*. 463 (2087): 2907–2927