

International Journal of Engineering Sciences & Research Technology

(A Peer Reviewed Online Journal)
Impact Factor: 5.164



Chief Editor
Dr. J.B. Helonde

Executive Editor
Mr. Somil Mayur Shah

ABSTRACT

Manual scavenging, made illegal in 2013, are still on the hike leading to the death of many. Private contractors hire to employ manual scavengers on a daily-wage basis. As a solution to this deplorable situation, our robotic system could be used as an alternative to manpower. Pipe - Bot is an automated sewer robot that can conduct an inspection of the sewage pipeline and clear any blockage within it. The robot first inspects sewer lines for cracks, corrosion obstacles, etc. A camera installed atop, performs visual inspection of the interior of the pipeline. These visuals are recorded for future reference and research. The robot is also equipped with proximity sensor to detect the presence of any obstacle in front of it. As the robot nears the obstacle, there is a turbine that cuts through the obstacle with a suction mechanism to effectively clear the obstacles. The system has size adjustment mechanism to fit into pipes of varying diameters. The robot can easily move over rough terrains due to its wheel-wall pressing traversing mechanism. This traversing mechanism provides better grip and stability to the robot. This potential device, thus, effectively and efficiently reduces all the impediments related to pipe cleaning and inspection.

KEYWORDS: manual scavenging; electronic cleaning; in-line inspection.

1. INTRODUCTION

The sewage being a harsh environment needs regular inspection and clearance because of obstacles like plant roots, corrosion in pipes, etc. These damages causes the groundwater to be contaminated and heavy rainfall events leads to inroad of the systems causing overflow. Sewage can leak out thus polluting soil and ground water and can wash away the soil, crowding the pavements.

Sewage contains non biodegradable chemicals leading to the emission of fumes that prove to be toxic to humans and animals. Internal inspection and maintenance is possible in cases where pipe diameters are large. Small sewers do not offer enough space for human beings, and whenever they are damaged the solution is to expose the affected pipe sections.

The historical cleaning techniques currently exist which includes many hydraulic and mechanical cleaning techniques among which some are Rodding, Bucket Machine, Kites etc. These techniques use tons and gallons of water to clear off the sewage wastes. But the main disadvantage of these techniques is that they are not very effective in removing heavy debris. Since large amounts of water are used, the water can get collected and remains stagnant. This stagnant water can cause pollution as well as spread of epidemic among the people. Many sewer cleaners risk their lives yearly in the Indian business hub of Mumbai because of a lack of basic safety gear.

[Metanoia 19]
ICTTM Value: 3.00

According to the 2011 census, almost 1.3 lakh households meet their livelihood only because they are working as manual scavengers. This list is topped by Maharashtra followed by Madhya Pradesh and Tripura. The workers are mainly from low castes and backward classes and they die before the age of 60 because of work-related health problems. Many workers working in such unemployable conditions die each month from accidents, suffocation or exposure to toxic gases. Workers use metal scrapers, brooms or just their bare hands to clear drainage and sanitation lines.

They are surrounded by swarms of cockroaches with no mask to protect them poisonous fumes. Sometimes, they are supposed to go much deeper underground with just a rope to prevent them from getting drowned in the sludge thus proving the job to be dangerous and risky as well. Nowadays, sewer robots with electronic automations reduce the cost of inspection and maintenance.

2. PROPOSED METHODOLOGY

Traversing mechanism

The traversing mechanism is carefully selected to ensure good traction and stability. This mechanism is chosen to enable the robot to move properly on any terrain such as smooth, rugged etc. The robot moves with wheels attached on each side of its triangular shaped body, therefore moves with 6 wheels in total.

The robot moves by pressing its wheels against the walls of pipe to be cleaned. The wheels are connected via motors and pulleys to the body in such a way that this itself works as a size adjustment mechanism for the system using which the robot could easily move through pipes with both small and large diameters.

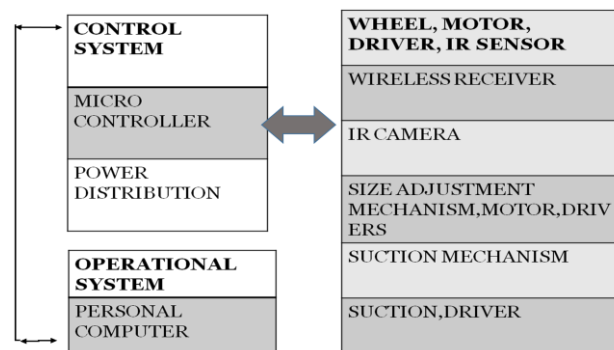


Figure 1.

Block diagram

Inspection mechanism

The inspection mechanism is effectively chosen to provide in-line inspection of the inner walls of the pipes and sewers.

To perform this function effectively, the system uses cameras and IR sensors. IR cameras are very useful in this project since the pipe-bot is required to work at fully enclosed or underground sewage pipes filled with darkness and IR cameras can provide visuals in the absence of light. IR cameras thus help in inspection of interior of the pipes for any cracks also. IR sensors are effective in providing additional information about the presence of obstacles.

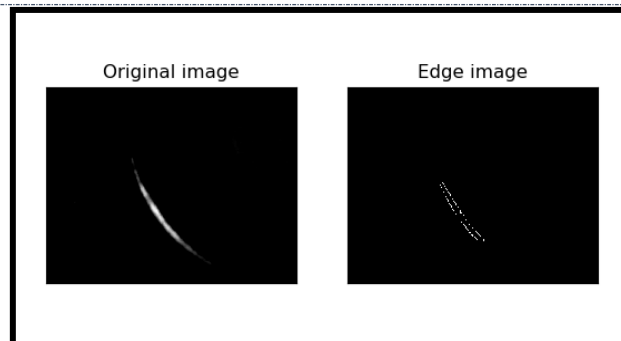


Figure 2. Crack and edge detection (output of python code)

Cleaning mechanism

The robot consists of a suction mechanism which rotates via a motor and cleans the pipe along its diameter as it moves through the pipe. It also has a turbine blade connected at the front end in order to cut through the obstacles, once the camera or sensors detect the presence of any obstacle, turbine starts working.

Thus it helps in smooth movement of the robot inside the pipe and effective cleaning also. Once the camera or sensors detect the presence of any obstacle turbine starts working. Debris or dirt which is difficult to suck using the suction mechanism could be swept or pushed to the end also. But mostly the suction mechanism shouldn't be facing much difficulty since cutting using turbine blades is useful prior to suction.

3. WORKING

All the above discussed sections work synchronously to enable the efficient working of the entire system.

Pipe - Bot is an automated sewer robot that can conduct an inspection of the sewage pipeline and clear any blockage within it. The robot moves with 6 wheels in total, with 3 wheels in front and 3 wheels at the back, touching the ground to provide increased traction and stability.

Pipe inspection is carried out using a camera that is enforced to obtain visuals of the interior of the pipe which is under inspection. A propeller can be used to perform obstacle clearance.

The pipe bot in general, has a triangular shaped body as shown in figure 3 with wheels attached for movement on its three sides. All the driving components of the system are placed in a platform inside this triangular structure. And the suction cup is also connected with a rotating motor in this for fine cleaning the inside of pipe.

The tube from suction cup, which will be carrying the dirt, is directed outside of the manhole. It will have enough length to carry dirt from one manhole to another without any breakage. There are turbine blades in the front end in order to cut through obstacles & there will be a heavy sweeping mechanism to push this dirt to the end of manhole.

Camera placed at the top of the robot obtains images inside the pipe. There are proximity sensors also, placed at the front end, to detect the obstacles which might have been missed by the camera. And there will be a wireless receiver (HC12) connected to the laptop, which will be receiving the information from pipe bot. Power for the system is given via wired connection.

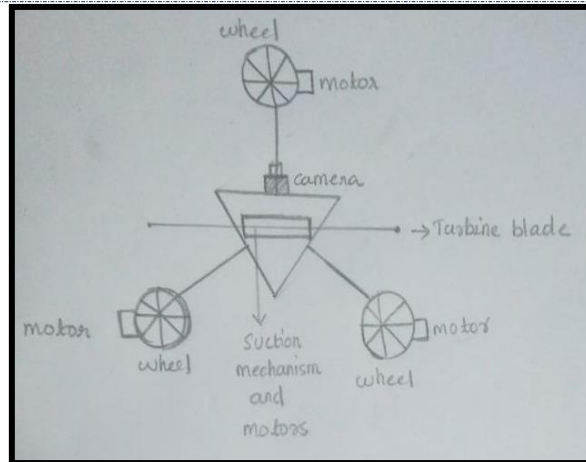


Figure 3. Front view of mechanical structure

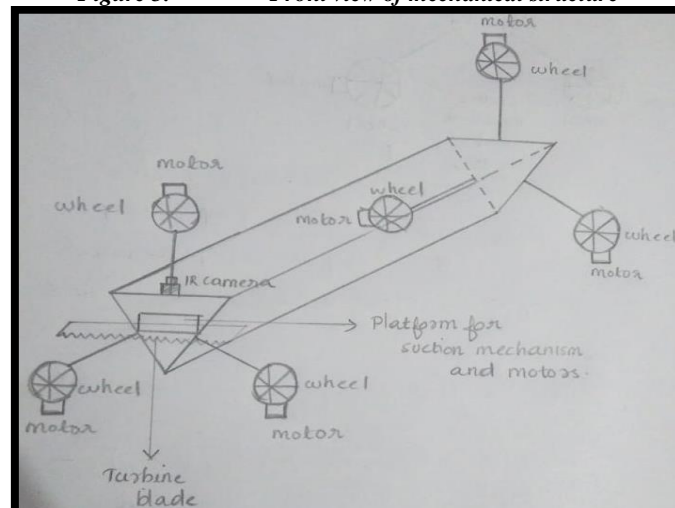


Figure 4. Side view of mechanical structure

4. SOCIAL RELEVANCE

Manual scavenging refers to manually cleaning, carrying, disposing or handling any form of human excreta and other wastes from dry latrines and sewers using tools such as buckets and brooms with India's lower castes performing this job. They force themselves into choked sewers and septic tanks, hang on for hours, scooping out filth with bare hands and bearing the stench of sewage. Despite pertaining laws, manual scavenging persists in India. While it has ended as a form of employment, the stigma and discrimination associated with it lingers on. The system is designed to overcome all the disadvantages associated with manual scavenging.

The system helps to reduce the time and cost needed to clean the pipes and sewers manually. It helps to prevent the spread of epidemic and thus protect mankind and causes no harm to human health. As the system uses very less amount of water, the ill effects associated with water pollution can be effectively reduced. This paves ways to make the environment a sustainable one thus making it safe and easy to implement. The system proves to be the most productive methodology to overcome all the problems existing at present.

5. CONCLUSION

The project proposes an innovative, fully autonomous and un-tethered sewer inspection and clearance robot which fits into pipes having an inner diameter of 10 inches having live streaming of the interior of the pipeline. Since the visual obtained can be recorded in the software, the data can be utilized for study of sewer pipelines. The same project can be extended by installing springs on the legs of the robot to adapt to different pipe diameter.

REFERENCES

- [1] ADS Environmental Services, 1998. "Sewer Evaluation Services." Internet site at [http://www.adsenv.com/what_we_do_services-syeval.html], accessed June, 1998.
- [2] Coe, C.D., K. Fu, and M.G. Wade, 1997. "Sewer Cleaning as a Diagnostic Tool," In Collection Systems Rehabilitation and O&M: Solving Today's Problems and Meeting Tomorrow's Needs, pp.12:27- 12:32.
- [3] Kerri, K.D. and J. Brady, 1993. Operation and Maintenance of Wastewater Collection Systems, Volume 1. Prepared for the EPA Office of Water Program Operations by the California State University, Sacramento, CA.
- [4] Pisano, W. N. Grande, and G. Novac, 1997. "Automated Sewer Flushing Large Diameter Sewers," In Collection Systems Rehabilitation and O&M: Solving Today's Problems and Meeting Tomorrow's Needs. pp. 12:9-12:20
- [5] Patrick, R., J. Rompala, A. Symkowski, W. Kingdom, R. Serpente, and N. For more information contact: Municipal Technology Branch U.S. EPA Mail Code 4204 401 M St., S.W. Washington, D.C., 20460 Freemn, 1997. Benchmarking Wastewater Operations-Collection, Treatment, and Biosolids Management. Water Environment Research Foundation
- [6] Alireza. Hadi, Gholamhossein. Mohammadi, "Developing a Sewer Inspection Robot through a Mechatronics Approach", International Conference on Mechanical, Automotive and Materials Engineering (ICMAME'2012) Jan. 7-8, 2012 Dubai D. P. Arnold, "Review of microscale magnetic power generation," submitted for publication.
- [7] NurAfiqahBinti Haji Yahya, NeginAshrafi, Ali Hussein Humod, "Development and Adaptability of In-Pipe Inspection Robots", IOSR Journal of Mechanical and Civil Engineering (IOSR-JMCE) e-ISSN: 2278-1684, p-ISSN: 2320-334X, Volume 11, Issue 4 Ver. VII (JulAug. 2014), PP 01-08.
- [8] Ryutaro Ishikawa, Takeru Tomita, Yasuyuki Yamada, Taro Nakamura, "Development of a peristaltic crawling robot for long-distance complex line sewer pipe inspections", Advanced Intelligent Mechatronics (AIM), 2016 IEEE International Conference on 12-15 July 2016, INSPEC Accession Number- 16340790.
- [9] L. Paletta, E. Rome, A. Pinz, "Visual object detection for autonomous sewer robots", Intelligent Robots and Systems, 1999.IROS '99.Proceedings. 1999 IEEE/RSJ International Conference on 17-21 Oct.1999
- [10] Yash Sharma, Deepak K Kushwah, Prashant Kumar and Abhijit J Chauhan, "BLOCKAGE REMOVAL AND RF CONTROLLED PIPE INSPECTION ROBOT (BRICR)", ISSN 2319 – 2518 www.ijeetc.com Vol. 4, No. 3, July 2015.